



AD NO. \_\_\_\_\_  
DTC PROJECT NO. 8-CO-160-UXO-021  
REPORT NO. ATC-9041



STANDARDIZED

UXO TECHNOLOGY DEMONSTRATION SITE

BLIND GRID SCORING RECORD NO. 383


SITE LOCATION:  
U.S. ARMY YUMA PROVING GROUND

DEMONSTRATOR:  
BLACKHAWK GEOSERVICES  
301 COMMERCIAL ROAD, SUITE B  
GOLDEN, CO 80401

TECHNOLOGY TYPE/PLATFORM:  
SIMULTANEOUS MAGNETOMETRY AND  
PULSED EM/MAN-PORTABLE

PREPARED BY:  
U.S. ARMY ABERDEEN TEST CENTER  
ABERDEEN PROVING GROUND, MD 21005-5059

JULY 2005



Prepared for:  
U.S. ARMY ENVIRONMENTAL CENTER  
ABERDEEN PROVING GROUND, MD 21010-5401

U.S. ARMY DEVELOPMENTAL TEST COMMAND  
ABERDEEN PROVING GROUND, MD 21005-5055

DISTRIBUTION UNLIMITED, JULY 2005.

## NOTICE

The use of trade names in this document does not constitute an official endorsement or approval of the use of such commercial hardware or software. This document may not be cited for purposes of advertisement.

<b>REPORT DOCUMENTATION PAGE</b>				Form Approved OMB No. 0704-0188	
<p>The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.</p> <p><b>PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.</b></p>					
1. REPORT DATE (DD-MM-YYYY) July 2005		2. REPORT TYPE Final		3. DATES COVERED (From - To) 18 May 2004	
4. TITLE AND SUBTITLE STANDARDIZED UXO TECHNOLOGY DEMONSTRATION SITE BLIND GRID SCORING RECORD NO. 383 (BLACKHAWK GEOSERVICES)				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S) Overbay, Larry; Robitaille, George The Standardized UXO Technology Demonstration Site Scoring Committee				5d. PROJECT NUMBER 8-CO-160-UXO-021	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Commander U.S. Army Aberdeen Test Center ATTN: CSTE-DTC-AT-SL-E Aberdeen Proving Ground, MD 21005-5059				8. PERFORMING ORGANIZATION REPORT NUMBER ATC-9041	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) Commander U.S. Army Environmental Center ATTN: SFIM-AEC-ATT Aberdeen Proving Ground, MD 21005-5401				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S) Same as item 8	
12. DISTRIBUTION/AVAILABILITY STATEMENT Distribution unlimited.					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT This scoring record documents the efforts of Blackhawk Geoservices to detect and discriminate inert unexploded ordnance (UXO) utilizing the YPG Standardized UXO Technology Demonstration Site Blind Grid. Scoring Records have been coordinated by Larry Overbay and the Standardized UXO Technology Demonstration Site Scoring Committee. Organizations on the committee include, the U.S. Army Corps of Engineers, the Environmental Security Technology Certification Program, the Strategic Environmental Research and Development Program, the Institute for Defense Analysis, the U.S. Army Environmental Center, and the U.S. Army Aberdeen Test Center.					
15. SUBJECT TERMS Blackhawk Geoservices, UXO Standardized Technology Demonstration Site Program, Blind Grid, Simultaneous Magnetometry and Pulsed EM/Man-Portable					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT  UL	18. NUMBER OF PAGES	19a. NAME OF RESPONSIBLE PERSON
a. REPORT Unclassified	b. ABSTRACT Unclassified	c. THIS PAGE Unclassified			19b. TELEPHONE NUMBER (Include area code)



## **TABLE OF CONTENTS**

### **PAGE**

### **SECTION 1. GENERAL INFORMATION**

1.1	BACKGROUND .....	1
1.2	SCORING OBJECTIVES .....	1
1.2.1	Scoring Methodology .....	1
1.2.2	Scoring Factors .....	3
1.3	STANDARD AND NONSTANDARD INERT ORDNANCE TARGETS .....	4

### **SECTION 2. DEMONSTRATION**

2.1	DEMONSTRATOR INFORMATION .....	5
2.1.1	Demonstrator Point of Contact (POC) and Address .....	5
2.1.2	System Description .....	5
2.1.3	Data Processing Description .....	6
2.1.4	Data Submission Format .....	7
2.1.5	Demonstrator Quality Assurance (QA) and Quality Control (QC) .....	7
2.1.6	Additional Records .....	8
2.2	YPG SITE INFORMATION .....	9
2.2.1	Location .....	9
2.2.2	Soil Type .....	9
2.2.3	Test Areas .....	10

### **SECTION 3. FIELD DATA**

3.1	DATE OF FIELD ACTIVITIES .....	11
3.2	AREAS TESTED/NUMBER OF HOURS .....	11
3.3	TEST CONDITIONS .....	11
3.3.1	Weather Conditions .....	11
3.3.2	Field Conditions .....	11
3.3.3	Soil Moisture .....	11
3.4	FIELD ACTIVITIES .....	12
3.4.1	Setup/Mobilization .....	12
3.4.2	Calibration .....	12
3.4.3	Downtime Occasions .....	12
3.4.4	Data Collection .....	12
3.4.5	Demobilization .....	12
3.5	PROCESSING TIME .....	13
3.6	DEMONSTRATOR'S FIELD SURVEYING METHOD .....	13
3.7	SUMMARY OF DAILY LOGS .....	13

## **SECTION 4. TECHNICAL PERFORMANCE RESULTS**

	<b><u>PAGE</u></b>
4.1 ROC CURVES USING ALL ORDNANCE CATEGORIES .....	15
4.2 ROC CURVES USING ORDNANCE LARGER THAN 20 MM .....	18
4.3 PERFORMANCE SUMMARIES .....	22
4.4 EFFICIENCY, REJECTION RATES, AND TYPE CLASSIFICATION .....	24
4.5 LOCATION ACCURACY .....	25

## **SECTION 5. ON-SITE LABOR COSTS**

## **SECTION 6. COMPARISON OF RESULTS TO BLIND GRID DEMONSTRATION**

## **SECTION 7. APPENDIXES**

A TERMS AND DEFINITIONS .....	A-1
B DAILY WEATHER LOGS .....	B-1
C SOIL MOISTURE .....	C-1
D DAILY ACTIVITY LOGS .....	D-1
E REFERENCES .....	E-1
F ABBREVIATIONS .....	F-1

## **SECTION 1. GENERAL INFORMATION**

### **1.1 BACKGROUND**

Technologies under development for the detection and discrimination of unexploded ordnance (UXO) require testing so that their performance can be characterized. To that end, Standardized Test Sites have been developed at Aberdeen Proving Ground (APG), Maryland and U.S. Army Yuma Proving Ground (YPG), Arizona. These test sites provide a diversity of geology, climate, terrain, and weather as well as diversity in ordnance and clutter. Testing at these sites is independently administered and analyzed by the government for the purposes of characterizing technologies, tracking performance with system development, comparing performance of different systems, and comparing performance in different environments.

The Standardized UXO Technology Demonstration Site Program is a multi-agency program spearheaded by the U.S. Army Environmental Center (AEC). The U.S. Army Aberdeen Test Center (ATC) and the U.S. Army Corps of Engineers Engineering Research and Development Center (ERDC) provide programmatic support. The program is being funded and supported by the Environmental Security Technology Certification Program (ESTCP), the Strategic Environmental Research and Development Program (SERDP) and the Army Environmental Quality Technology Program (EQT).

### **1.2 SCORING OBJECTIVES**

The objective in the Standardized UXO Technology Demonstration Site Program is to evaluate the detection and discrimination capabilities of a given technology under various field and soil conditions. Inert munitions and clutter items are positioned in various orientations and depths in the ground.

The evaluation objectives are as follows:

- a. To determine detection and discrimination effectiveness under realistic scenarios that vary targets, geology, clutter, topography, and vegetation.
- b. To determine cost, time, and manpower requirements to operate the technology.
- c. To determine demonstrator's ability to analyze survey data in a timely manner and provide prioritized "Target Lists" with associated confidence levels.
- d. To provide independent site management to enable the collection of high quality, ground-truth, geo-referenced data for post-demonstration analysis.

#### **1.2.1 Scoring Methodology**

- a. The scoring of the demonstrator's performance is conducted in two stages. These two stages are termed the RESPONSE STAGE and DISCRIMINATION STAGE. For both stages, the probability of detection ( $P_d$ ) and the false alarms are reported as receiver-operating

characteristic (ROC) curves. False alarms are divided into those anomalies that correspond to emplaced clutter items, measuring the probability of false positive ( $P_{fp}$ ), and those that do not correspond to any known item, termed background alarms.

b. The RESPONSE STAGE scoring evaluates the ability of the system to detect emplaced targets without regard to ability to discriminate ordnance from other anomalies. For the blind grid RESPONSE STAGE, the demonstrator provides the scoring committee with a target response from each and every grid square along with a noise level below which target responses are deemed insufficient to warrant further investigation. This list is generated with minimal processing and, since a value is provided for every grid square, will include signals both above and below the system noise level.

c. The DISCRIMINATION STAGE evaluates the demonstrator's ability to correctly identify ordnance as such and to reject clutter. For the blind grid DISCRIMINATION STAGE, the demonstrator provides the scoring committee with the output of the algorithms applied in the discrimination-stage processing for each grid square. The values in this list are prioritized based on the demonstrator's determination that a grid square is likely to contain ordnance. Thus, higher output values are indicative of higher confidence that an ordnance item is present at the specified location. For digital signal processing, priority ranking is based on algorithm output. For other discrimination approaches, priority ranking is based on human (subjective) judgment. The demonstrator also specifies the threshold in the prioritized ranking that provides optimum performance, (i.e. that is expected to retain all detected ordnance and rejects the maximum amount of clutter).

d. The demonstrator is also scored on EFFICIENCY and REJECTION RATIO, which measures the effectiveness of the discrimination stage processing. The goal of discrimination is to retain the greatest number of ordnance detections from the anomaly list, while rejecting the maximum number of anomalies arising from non-ordnance items. EFFICIENCY measures the fraction of detected ordnance retained after discrimination, while the REJECTION RATIO measures the fraction of false alarms rejected. Both measures are defined relative to performance at the demonstrator-supplied level below which all responses are considered noise, i.e., the maximum ordnance detectable by the sensor and its accompanying false positive rate or background alarm rate.

e. All scoring factors are generated utilizing the Standardized UXO Probability and Plot Program, version 3.1.1.

### **1.2.2 Scoring Factors**

Factors to be measured and evaluated as part of this demonstration include:

a. Response Stage ROC curves:

(1) Probability of Detection ( $P_d^{res}$ ).

(2) Probability of False Positive ( $P_{fp}^{res}$ ).

(3) Background Alarm Rate ( $BAR^{res}$ ) or Probability of Background Alarm ( $P_{BA}^{res}$ ).

b. Discrimination Stage ROC curves:

- (1) Probability of Detection ( $P_d^{\text{disc}}$ ).
- (2) Probability of False Positive ( $P_{fp}^{\text{disc}}$ ).
- (3) Background Alarm Rate ( $BAR^{\text{disc}}$ ) or Probability of Background Alarm ( $P_{BA}^{\text{disc}}$ ).

c. Metrics:

- (1) Efficiency (E).
- (2) False Positive Rejection Rate ( $R_{fp}$ ).
- (3) Background Alarm Rejection Rate ( $R_{BA}$ ).

d. Other:

- (1) Probability of Detection by Size and Depth.
- (2) Classification by type (i.e., 20-mm, 40-mm, 105-mm, etc.).
- (3) Location accuracy.
- (4) Equipment setup, calibration time and corresponding man-hour requirements.
- (5) Survey time and corresponding man-hour requirements.
- (6) Reacquisition/resurvey time and man-hour requirements (if any).
- (7) Downtime due to system malfunctions and maintenance requirements.

### **1.3 STANDARD AND NONSTANDARD INERT ORDNANCE TARGETS**

The standard and nonstandard ordnance items emplaced in the test areas are listed in Table 1. Standardized targets are members of a set of specific ordnance items that have identical properties to all other items in the set (caliber, configuration, size, weight, aspect ratio, material, filler, magnetic remanence, and nomenclature). Nonstandard targets are ordnance items having properties that differ from those in the set of standardized targets.

**TABLE 1. INERT ORDNANCE TARGETS**

<b>Standard Type</b>	<b>Nonstandard (NS)</b>
20-mm Projectile M55	20-mm Projectile M55
	20-mm Projectile M97
40-mm Grenades M385	40-mm Grenades M385
40-mm Projectile MKII Bodies	40-mm Projectile M813
BDU-28 Submunition	
BLU-26 Submunition	
M42 Submunition	
57-mm Projectile APC M86	
60-mm Mortar M49A3	60-mm Mortar (JPG)
	60-mm Mortar M49
2.75-inch Rocket M230	2.75-inch Rocket M230
	2.75-inch Rocket XM229
MK 118 ROCKEYE	
81-mm Mortar M374	81-mm Mortar (JPG)
	81-mm Mortar M374
105-mm HEAT Rounds M456	
105-mm Projectile M60	105-mm Projectile M60
155-mm Projectile M483A1	155-mm Projectile M483A
	500-lb Bomb
	M75 Submunition

JPG = Jefferson Proving Ground

HEAT = high-explosive antitank

## **SECTION 2. DEMONSTRATION**

### **2.1 DEMONSTRATOR INFORMATION**

#### **2.1.1 Demonstrator Point of Contact (POC) and Address**

Blackhawk GeoServices  
301 Commercial Road, Suite B  
Golden, CO 80401

#### **2.1.2 System Description (provided by demonstrator)**

Simultaneous Magnetometry and Pulsed electromagnetic (EM) recorded and controlled in one unit. The approach Blackhawk will demonstrate is a small hand towed trailer one-man EM/MAG system (fig. 1). The proposed AGS1-MK-II system will record four Cesium magnetometer sensors (Geometrics G822/A) as well as an EM61 MK-II system. The cesium vapor sensors will be sampled during the 'off' time of the EM pulse. When set for operation in 60Hz power areas, the EM61 MK-II continuously emits EM pulses at a repetition rate of 75 Hz. Given a decay time of approximately 8 msec, this leaves a further 5 msec during which the larmor signals from the magnetometer systems can be counted and measured.



Figure 1. Demonstrator's system, Simultaneous Magnetometry and Pulsed EM/man-portable.

The AGS1-MK-II system uses proprietary counters implemented in FPGA (Field Programmable Gate Array) integrated circuits to measure the frequency of the larmor signal with a resolution of approximately 0.015 nT in a time of 5 msec. The actual measurement time used

can be controlled by the operator from between 1.3 msec (resolution approximately 0.1nT) to 30 msec (0.001nT).

The sync output pulse of the EM61 MK-II is used to synchronize the counters of the AGS1-MK-II so that they begin a measurement of the larmor frequency at a programmable delay time after the falling edge of the 4 msec wide sync pulse.

The operation of the AGS1-MK-II and the recording of data is controlled over a single standard 115Kbaud RS232 link by a notebook PC running custom data acquisition software (AGS dat) under Windows 2000. The AGS1-MK-II uses dual 32 bit embedded processors, each controlling 2 larmor counters as well as sharing the handling of the data from the other sensors. The single logged file is then processed to give both a magnetic data grid and an EM data grid.

Main system components:

- 4 cesium vapor sensors
- 1 EM MK-II sensors
- SeaTerra AGS MK-II system controller
- DGPS (Trimble 5700 with base station or Trimble AG-(Global Positioning System (GPS) with satellite reference signal)
- optional 3-axis digital compass
- optional 3D component fluxgate magnetometer for compensation
- notebook computer
- proprietary data recording and navigational software AGSDat
- navigation instruments and displays
- proprietary data processing software AGSProc
- Platforms: hand carried one and two man system; hand towed one man system; vehicle towed trailer system

### **2.1.3 Data Processing Description (provided by demonstrator)**

Blackhawk will collect data in this area using GPS positioning methods. The GPS antennae will be located on the sensor cart mounted directly over the center of the sensor arrays. The sensor array will consist of four G858 sensors spaced 0.33 meters apart and a 1.0-meter by 0.5-meter EM61 MK-II coil, resulting in a 1-meter sample width. Position data will be recorded on the AGS-MK-II data logger along with the sensor data. The AGS1-MK-II system is also used to record the EM61 MK-II data. The magnetic data is recorded in distance mode at 5 cm

intervals using a cotton thread odometer or a wheel trigger and/or DGPS. The EM61 MK-II data is recorded in distance mode using the wheel odometer to give 20 cm samples.

The raw data from the AGS-MK-II is output in a binary format. The binary format is converted to ASCII with the AGSProc processing software. Numerous import and export options of the AGSProc software making the system open for allow for data exchange (GIS, CAD, XYZ, and Geosoft formats).

Prior to data collection, Blackhawk will survey a grid system over the site on 200 ft by 200 ft centers. Data will be collected within the 200 ft grids. Measuring tapes will be stretched across the boundaries of the grid and at several locations within the grid. The number of markings will depend on the openness of the terrain. Data will be collected along nominal 2.5 to 3.0 foot line spacings. Traffic cone markers will be placed along the tapes and moved as the equipment operator passes the tape. This will ensure that the sensor array maintains a nominal 2.5 to 3-foot spacing between survey lines. The actual position of the geophysical sensors will be determined from the GPS.

In those areas of the open field test site where there are obstructions, the established grids will be 100 feet by 100 feet to ensure coverage.

#### **2.1.4 Data Submission Format**

Data were submitted for scoring in accordance with data submission protocols outlined in the Standardized UXO Technology Demonstration Site Handbook. These submitted data are not included in this report in order to protect ground truth information.

#### **2.1.5 Demonstrator Quality Assurance (QA) and Quality Control (QC) (provided by demonstrator)**

Overview of Quality Control (QC):

The positioning information, survey setup parameters and sensor data are recorded on a mobile laptop computer/field data logger. The data recording allows real time control and display of all survey information and the survey data. A programmable acoustic tone is used to indicate to the operator monitor the signal level from one or more of the sensors. This is basically real time data quality control, which is very useful because the operator is not able to watch the display all the time during fieldwork. The navigational display shows real time sensor tracks overlaid on the survey map. WGS 84 coordinates are transformed in real time into local or Universal Transverse Mercator (UTM) coordinates. Sensor signal data, speed, compass information as well as technical parameters like battery voltage etc. are visible in real time for the operator. The first initial data processing is optimized allowing the data to be processed onsite. The proprietary data processing software AGSProc is used to view the recorded raw data as profile lines and as a gridded image. Viewing this data takes a few minutes and allows an immediate control of the data quality as well as the coverage of the area in the field.

Prior to data collection, all electronic equipment is turned on and warmed up for a minimum of 15 minutes. After warm up, data are recorded for the EM and magnetic sensors for three minutes. This information is used to verify the proper performance of the sensors prior to collection of survey data. In addition, data are recorded over a ferrous metal standard located in the same position relative to the geophysical sensors on a daily basis. This ensures that sensor response is consistent throughout the survey. Positional accuracy of the system is also verified on a daily basis by data collection over a point whose absolute location is known. Data are collected in opposite travel directions in two traverses across the point. This data is recorded and used to verify the GPS is operating correctly. If during the real time monitoring of the survey data the operator suspects that all or a portion of the system is not operating correctly, the QC tests are repeated.

#### Overview of Quality Assurance (QA):

Blackhawk has conducted geophysical surveys for government and private clients during which stringent QA/QC procedures have been required. Blackhawk's corporate QA/QC program is developed to provide guidance for all divisions of the firm. QA/QC procedures are applied to each project and peer review of work/reports is the standard protocol.

Blackhawk management identifies project key project personnel and project team members with designated responsibilities and requirements. The project manager (PM) meets the qualification requirements of the project, including education, experience, and registrations. The PM or if applicable, the QA/QC officer, ensures equipment validation including equipment testing for representativeness in addition to correctness for expected result along with equipment standardization for functionality and optimization to meet acceptance criteria.

There is also verification of format for deliverables (e.g., data and reports) and their schedule as well as data recording and documentation; data transmission and verification that all recorded data are present; and data monitoring which includes monitoring the standardization parameters required to meet the acceptance criteria, including monitoring for accuracy and precision. Data evaluation includes data interpretation and reporting.

Final reporting of all these actions includes peer review/senior review approval.

As a result of this successful QA/QC program, Blackhawk and Blackhawk-led teams have well-defined responsibilities that include stop-work authority and organizational freedom to identify problems and to evaluate, initiate, recommend or provide solutions; and to approve corrective actions thus ensuring that all work complies with stipulated contractual requirements.

#### **2.1.6 Additional Records**

The following record(s) by this vendor can be accessed via the Internet as MicroSoft Word documents at [www.uxotestsites.org](http://www.uxotestsites.org).

## **2.2 YPG SITE INFORMATION**

### **2.2.1 Location**

YPG is located adjacent to the Colorado River in the Sonoran Desert. The UXO Standardized Test Site is located south of Pole Line Road and east of the Countermine Testing and Training Range. The Open Field range, Calibration Grid, Blind Grid, Mogul area, and Desert Extreme area comprise the 350 by 500-meter general test site area. The open field site is the largest of the test sites and measures approximately 200 by 350 meters. To the east of the open field range are the calibration and blind test grids that measure 30 by 40 meters and 40 by 40 meters, respectively. South of the Open Field is the 135- by 80-meter Mogul area consisting of a sequence of man-made depressions. The Desert Extreme area is located southeast of the open field site and has dimensions of 50 by 100 meters. The Desert Extreme area, covered with desert-type vegetation, is used to test the performance of different sensor platforms in a more severe desert conditions/environment.

### **2.2.2 Soil Type**

Soil samples were collected at the YPG UXO Standardized Test Site by ERDC to characterize the shallow subsurface (< 3 m). Both surface grab samples and continuous soil borings were acquired. The soils were subjected to several laboratory analyses, including sieve/hydrometer, water content, magnetic susceptibility, dielectric permittivity, X-ray diffraction, and visual description.

There are two soil complexes present within the site, Riverbend-Carrizo and Cristobal-Gunsight. The Riverbend-Carrizo complex is comprised of mixed stream alluvium, whereas the Cristobal-Gunsight complex is derived from fan alluvium. The Cristobal-Gunsight complex covers the majority of the site. Most of the soil samples were classified as either a sandy loam or loamy sand, with most samples containing gravel-size particles. All samples had a measured water content less than 7 percent, except for two that contained 11-percent moisture. The majority of soil samples had water content between 1 to 2 percent. Samples containing more than 3 percent were generally deeper than 1 meter.

An X-ray diffraction analysis on four soil samples indicated a basic mineralogy of quartz, calcite, mica, feldspar, magnetite, and some clay. The presence of magnetite imparted a moderate magnetic susceptibility, with volume susceptibilities generally greater than 100 by 10<sup>-5</sup> SI.

For more details concerning the soil properties at the YPG test site, go to [www.uxotestsites.org](http://www.uxotestsites.org) on the web to view the entire soils description report.

### 2.2.3 Test Areas

A description of the test site areas at YPG is included in Table 2.

**TABLE 2. TEST SITE AREAS**

<b>Area</b>	<b>Description</b>
Calibration Grid	Contains the 15 standard ordnance items buried in six positions at various angles and depths to allow demonstrator equipment calibration.
Blind Grid	Contains 400 grid cells in a 0.16-hectare (0.39-acre) site. The center of each grid cell contains ordnance, clutter, or nothing.

### **SECTION 3. FIELD DATA**

#### **3.1 DATE OF FIELD ACTIVITIES (18 May 2004)**

#### **3.2 AREAS TESTED/NUMBER OF HOURS**

Areas tested and total number of hours operated at each site are summarized in Table 3.

**TABLE 3. AREAS TESTED AND  
NUMBER OF HOURS**

<b>Area</b>	<b>Number of Hours</b>
Calibration Lanes	2.87
Blind Grid	2.3

#### **3.3 TEST CONDITIONS**

##### **3.3.1 Weather Conditions**

A YPG weather station located approximately one mile west of the test site was used to record average temperature and precipitation on a half hour basis for each day of operation. The temperatures listed in Table 4 represent the average temperature during field operations from 0700 to 1700 hours while precipitation data represents a daily total amount of rainfall. Hourly weather logs used to generate this summary are provided in Appendix B.

**TABLE 4. TEMPERATURE/PRECIPITATION DATA SUMMARY**

<b>Date, 2004</b>	<b>Average Temperature, °C</b>	<b>Total Daily Precipitation, in.</b>
May 18	30.6	0.00

##### **3.3.2 Field Conditions**

The field was dry and the weather was warm during the Blackhawk survey.

##### **3.3.3 Soil Moisture**

Three soil probes were placed at various locations within the site to capture soil moisture data: Calibration, Mogul, Open Field, and Wooded areas. Measurements were collected in percent moisture and were taken twice daily (morning and afternoon) from five different soil depths (1 to 6 in., 6 to 12 in., 12 to 24 in., 24 to 36 in., and 36 to 48 in.) from each probe. Soil moisture logs are included in Appendix C.

### **3.4 FIELD ACTIVITIES**

#### **3.4.1 Setup/Mobilization**

These activities included initial mobilization and daily equipment preparation and break down. A two-person crew took 7 hours and 50 minutes to perform the initial setup and mobilization. There was 32 minutes of daily equipment preparation and end of the day equipment break down lasted 30 minutes.

#### **3.4.2 Calibration**

Blackhawk spent a total of 3 hours and 52 minutes in the calibration lanes, of which 1-hour and 12 minutes was spent collecting data. An additional 20 minutes was spent calibrating in the Blind Grid.

#### **3.4.3 Downtime Occasions**

Occasions of downtime are grouped into five categories: equipment/data checks or equipment maintenance, equipment failure and repair, weather, Demonstration Site issues, or breaks/lunch. All downtime is included for the purposes of calculating labor costs (section 5) except for downtime due to Demonstration Site issues. Demonstration Site issues, while noted in the Daily Log, are considered non-chargeable downtime for the purposes of calculating labor costs and are not discussed. Breaks and lunches are discussed in this section and billed to the total Site Survey area.

**3.4.3.1 Equipment/data checks, maintenance.** Equipment data checks and maintenance activities accounted for 8 minutes of site usage time. These activities included changing out batteries and routine data checks to ensure the data was being properly recorded/collected. Blackhawk spent no additional time for breaks and lunches.

**3.4.3.2 Equipment failure or repair.** No time was needed to resolve equipment failures that occurred while surveying the Blind Grid.

**3.4.3.3 Weather.** No weather delays occurred during the survey.

#### **3.4.4 Data Collection**

Blackhawk spent a total time of 2 hours in the Blind Grid area, 50 minutes of which was spent collecting data.

#### **3.4.5 Demobilization**

The Blackhawk survey crew went on to conducted a full demonstration of the site. Therefore, demobilization did not occur until 28 May 2004. On that day, it took the crew 1-hour and 43 minutes to break down and pack up their equipment.

### **3.5 PROCESSING TIME**

Blackhawk submitted the raw data from the demonstration activities on the last day of the demonstration, as required. The scoring submittal data was also provided within the required 30-day timeframe.

### **3.6 DEMONSTRATOR'S FIELD SURVEYING METHOD**

Blackhawk collected data in a linear fashion and a south to north direction.

### **3.7 SUMMARY OF DAILY LOGS**

Daily logs capture all field activities during this demonstration and are located in Appendix D. Activities pertinent to this specific demonstration are indicated in highlighted text.

## SECTION 4. TECHNICAL PERFORMANCE RESULTS

### 4.1 ROC CURVES USING ALL ORDNANCE CATEGORIES

Figure 2, 4, and 6 shows the probability of detection for the response stage ( $P_d^{\text{res}}$ ) and the discrimination stage ( $P_d^{\text{disc}}$ ) versus their respective probability of false positive for the EM sensor(s), MAG sensor(s) and combined EM/MAG picks respectively. Figure 3, 5, and 7 shows both probabilities plotted against their respective probability of background alarm. Both figures use horizontal lines to illustrate the performance of the demonstrator at two demonstrator-specified points: at the system noise level for the response stage, representing the point below which targets are not considered detectable, and at the demonstrator's recommended threshold level for the discrimination stage, defining the subset of targets the demonstrator would recommend digging based on discrimination. Note that all points have been rounded to protect the ground truth.

The overall ground truth is composed of ferrous and non-ferrous anomalies. Due to limitations of the magnetometer, the non-ferrous items cannot be detected. Therefore, the ROC curves presented in figures 4 and 5 of this section are based on the subset of the ground truth that is solely made up of ferrous anomalies.

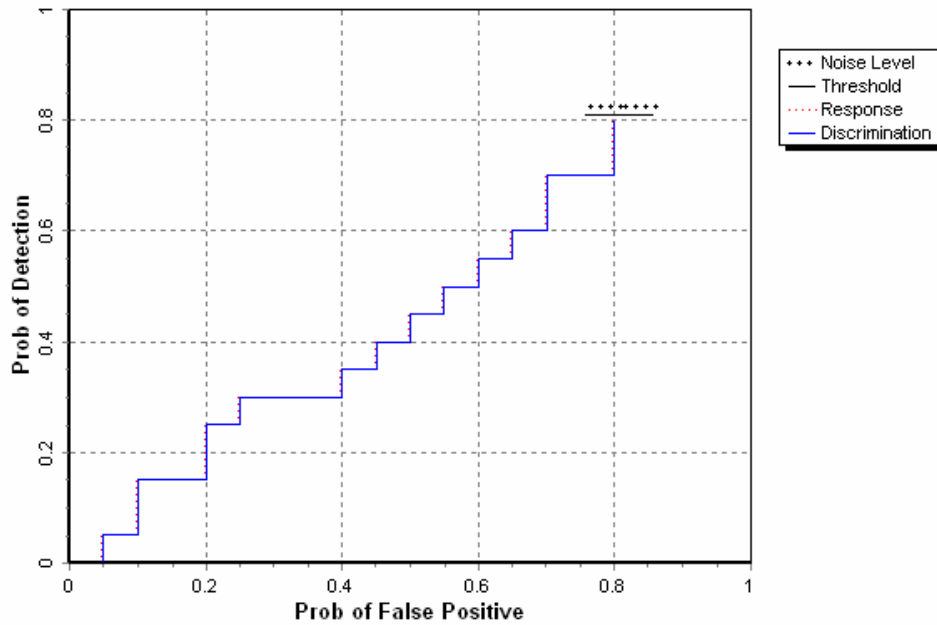


Figure 2. Pulsed EM blind grid probability of detection for response and discrimination stages versus their respective probability of false positive over all ordnance categories combined.

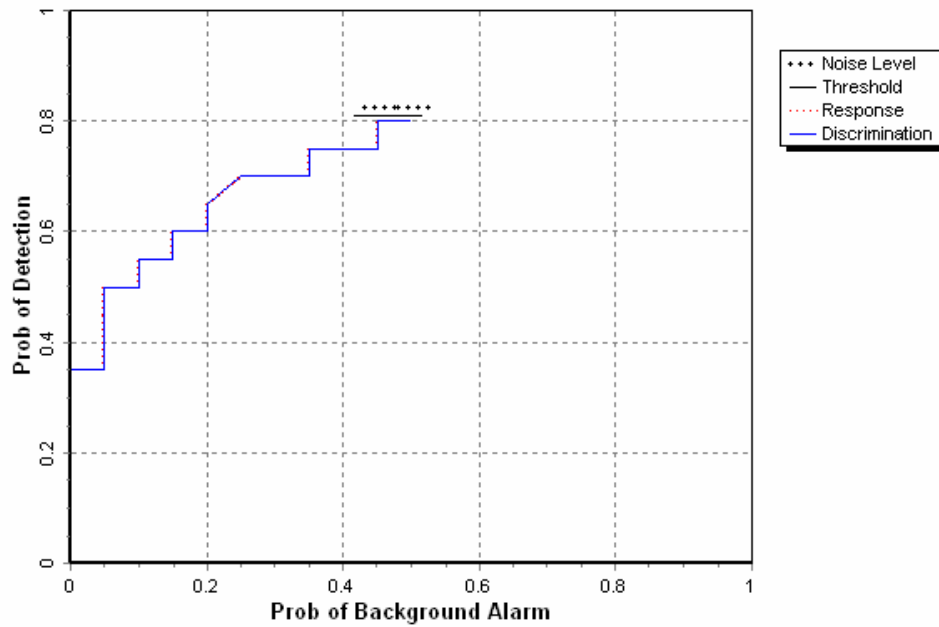


Figure 3. Pulsed EM blind grid probability of detection for response and discrimination stages versus their respective probability of background alarm over all ordnance categories combined.

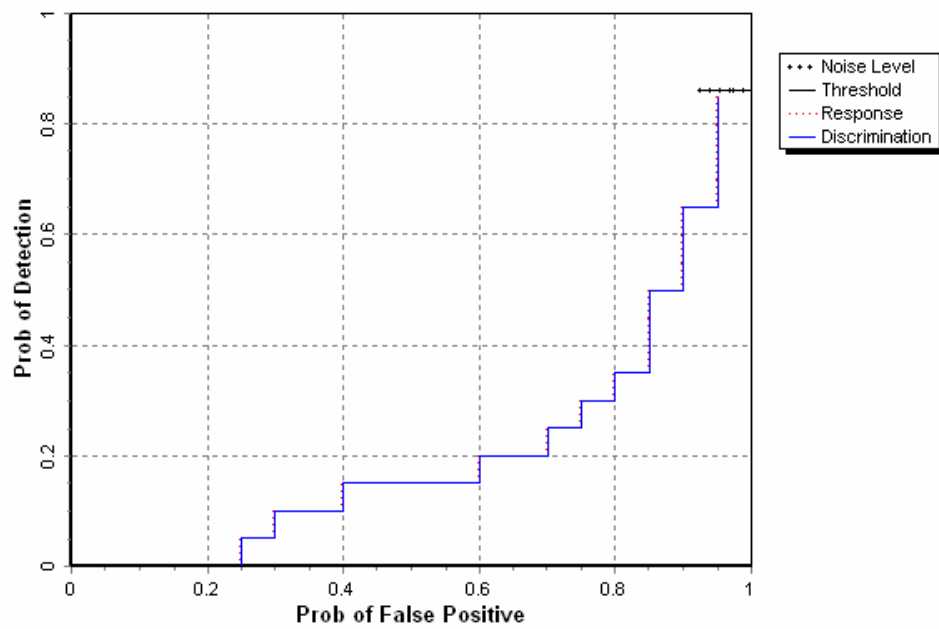


Figure 4. Simultaneous Magnetometry blind grid probability of detection for response and discrimination stages versus their respective probability of false positive over all ordnance categories combined.

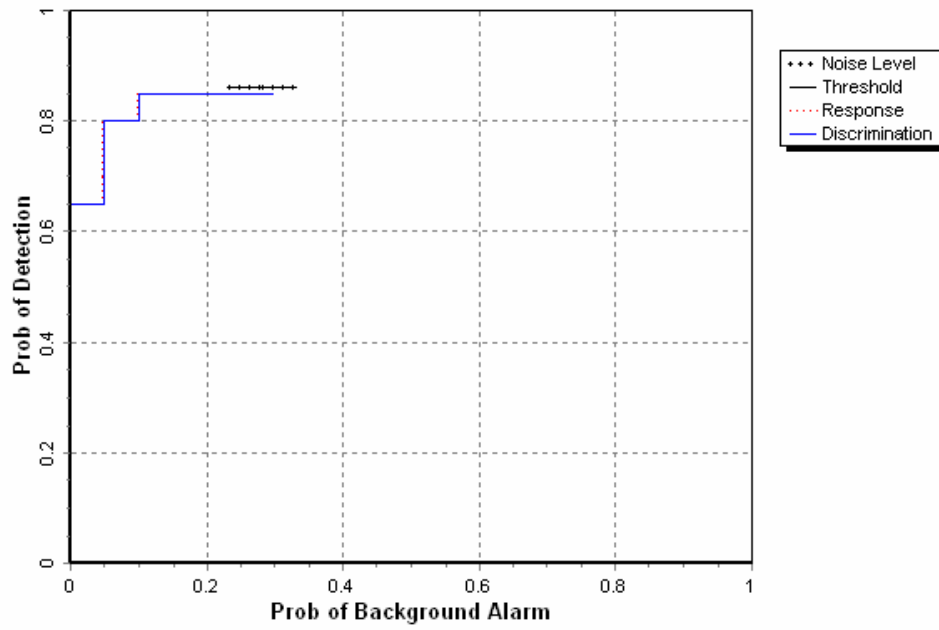


Figure 5. Simultaneous Magnetometry blind grid probability of detection for response and discrimination stages versus their respective probability of background alarm over all ordnance categories combined.

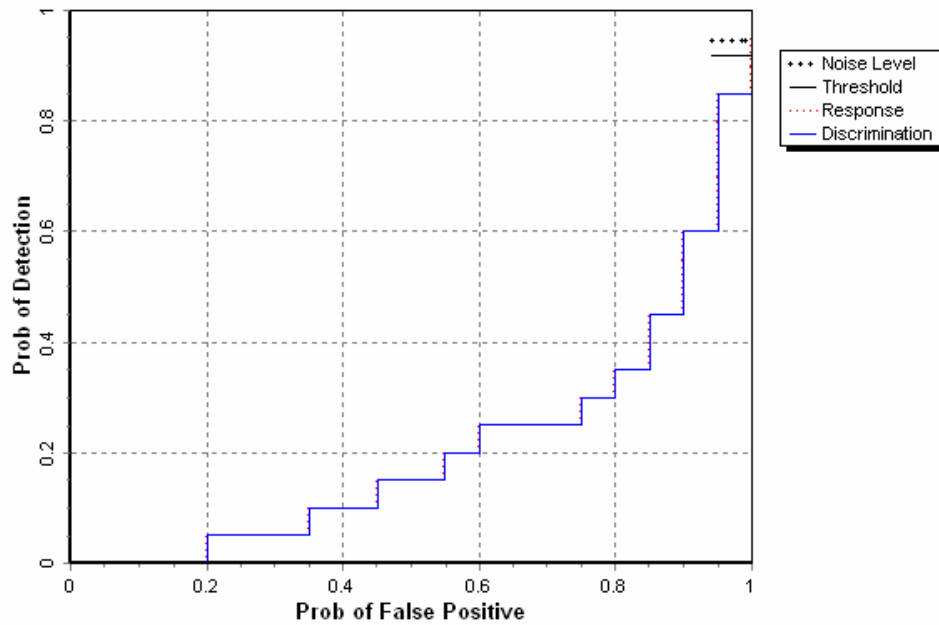


Figure 6. Combined sensor blind grid probability of detection for response and discrimination stages versus their respective probability of false positive over all ordnance categories combined.

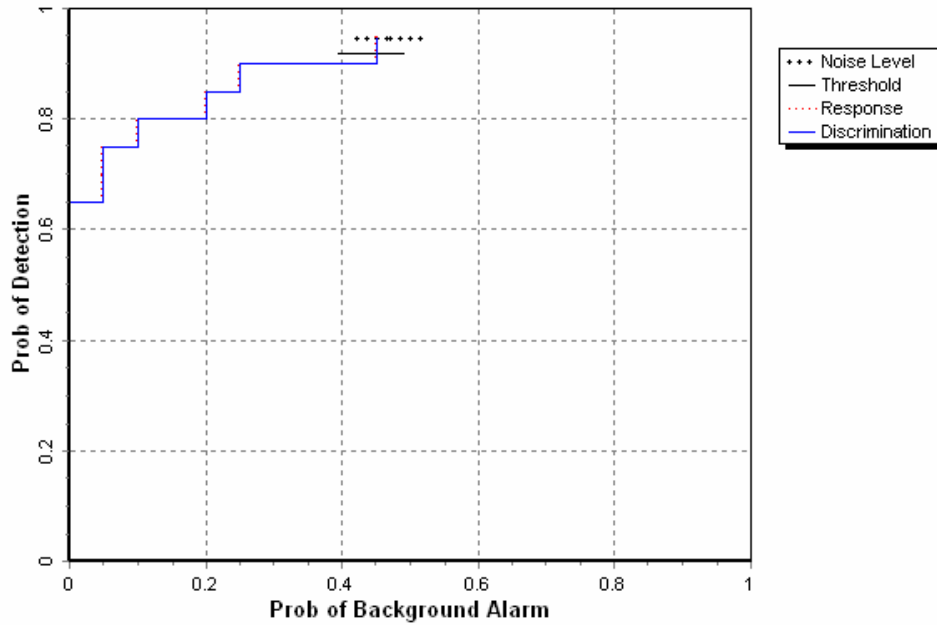


Figure 7. Combined sensor blind grid probability of detection for response and discrimination stages versus their respective probability of background alarm over all ordnance categories combined.

## 4.2 ROC CURVES USING ORDNANCE LARGER THAN 20 MM

Figure 8, 10, and 12 shows the probability of detection for the response stage ( $P_d^{\text{res}}$ ) and the discrimination stage ( $P_d^{\text{disc}}$ ) versus their respective probability of false positive when only targets larger than 20 mm are scored for the EM sensor(s), MAG sensor(s) and Combined EM/MAG picks respectively. Figure 9, 11, and 13 shows both probabilities plotted against their respective probability of background alarm. Both figures use horizontal lines to illustrate the performance of the demonstrator at two demonstrator-specified points: at the system noise level for the response stage, representing the point below which targets are not considered detectable, and at the demonstrator's recommended threshold level for the discrimination stage, defining the subset of targets the demonstrator would recommend digging based on discrimination. Note that all points have been rounded to protect the ground truth.

The overall ground truth is composed of ferrous and non-ferrous anomalies. Due to limitations of the magnetometer, the non-ferrous items cannot be detected. Therefore, the ROC curves presented in figures 10 and 11 of this section are based on the subset of the ground truth that is solely made up of ferrous anomalies.

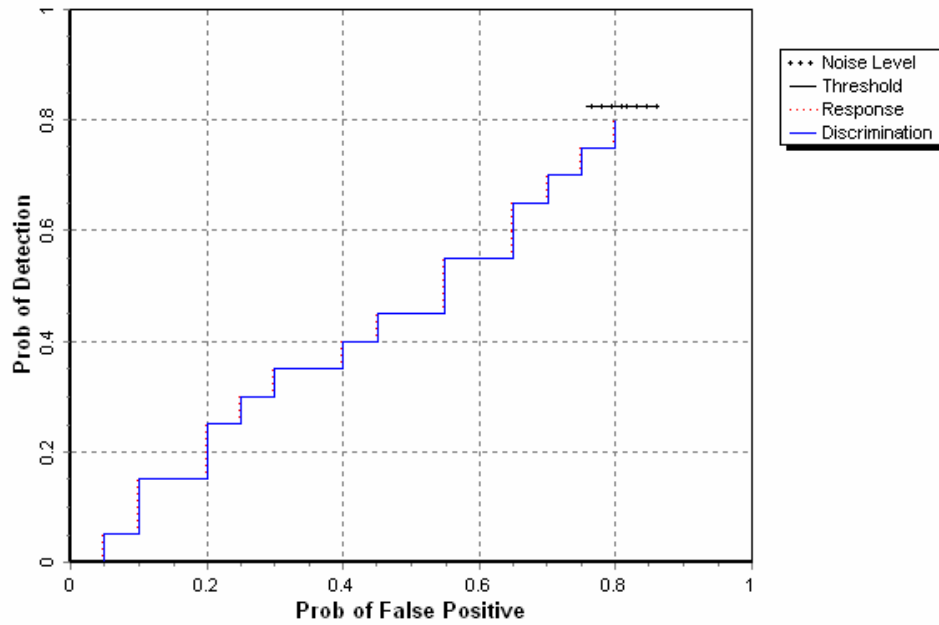


Figure 8. Pulsed EM blind grid probability of detection for response and discrimination stages versus their respective probability of false positive for all ordnance larger than 20 mm.

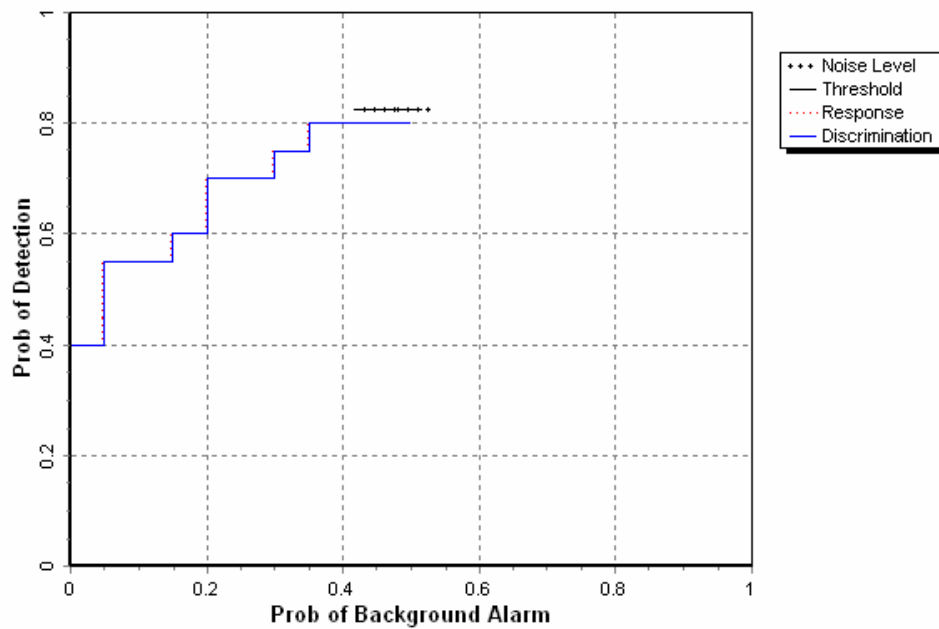


Figure 9. Pulsed EM blind grid probability of detection for response and discrimination stages versus their respective probabilities of background alarm for all ordnance larger than 20 mm.

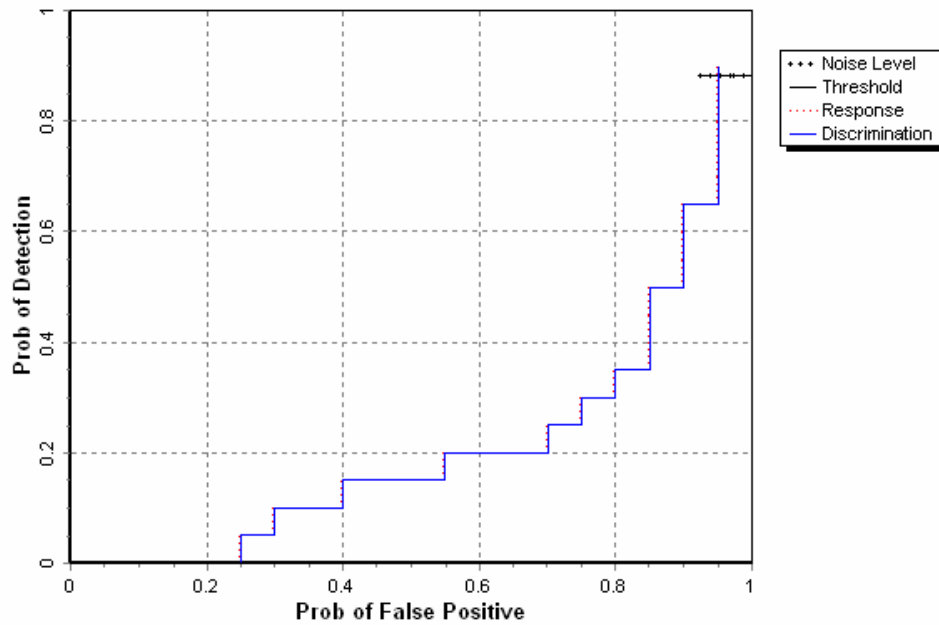


Figure 10. Simultaneous Magnetometry blind grid probability of detection for response and discrimination stages versus their respective probability of false positive for all ordnance larger than 20 mm.

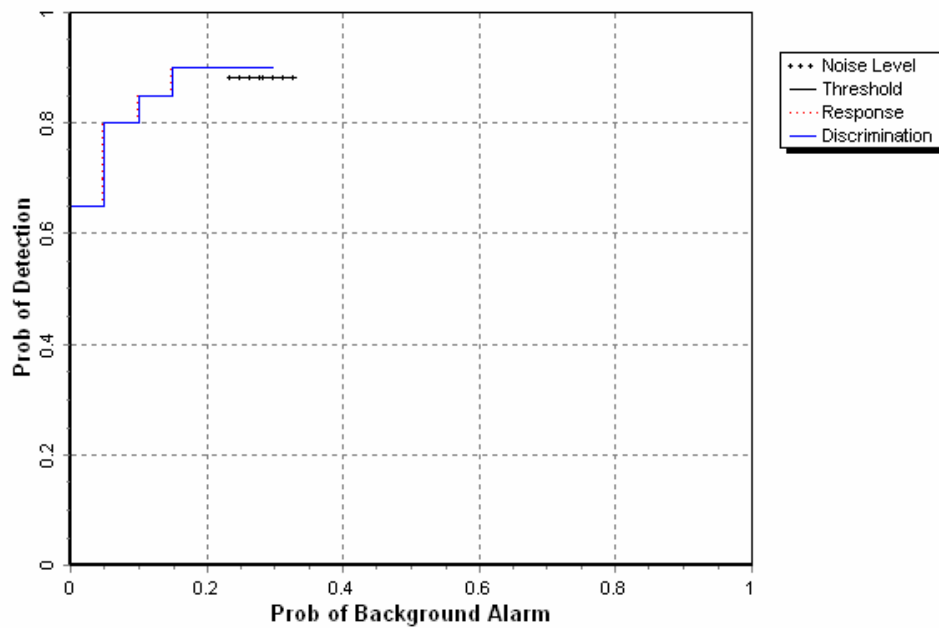


Figure 11. Simultaneous Magnetometry blind grid probability of detection for response and discrimination stages versus their respective probabilities of background alarm for all ordnance larger than 20 mm.

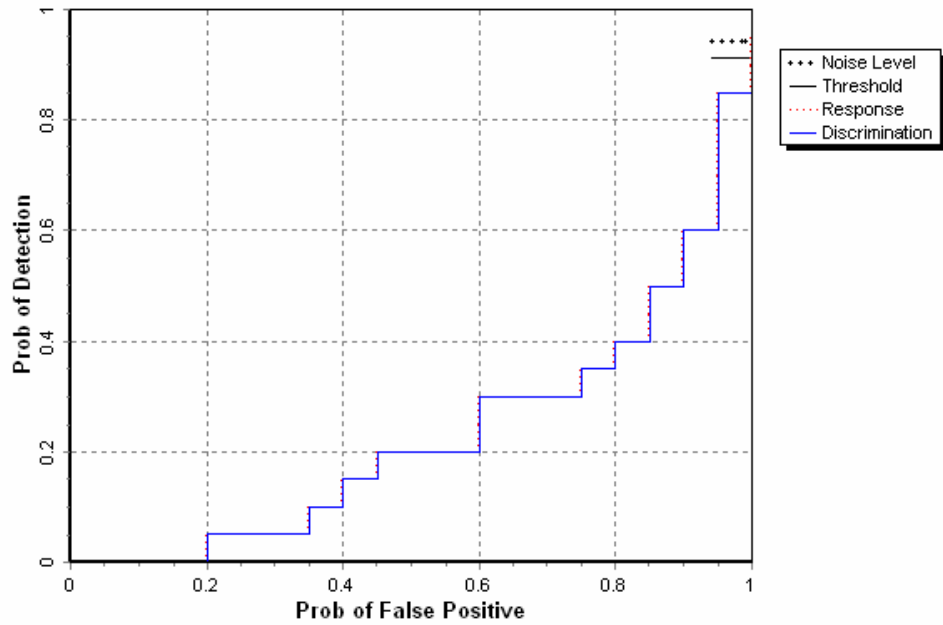


Figure 12. Combined sensor blind grid probability of detection for response and discrimination stages versus their respective probability of false positive for all ordnance larger than 20 mm.

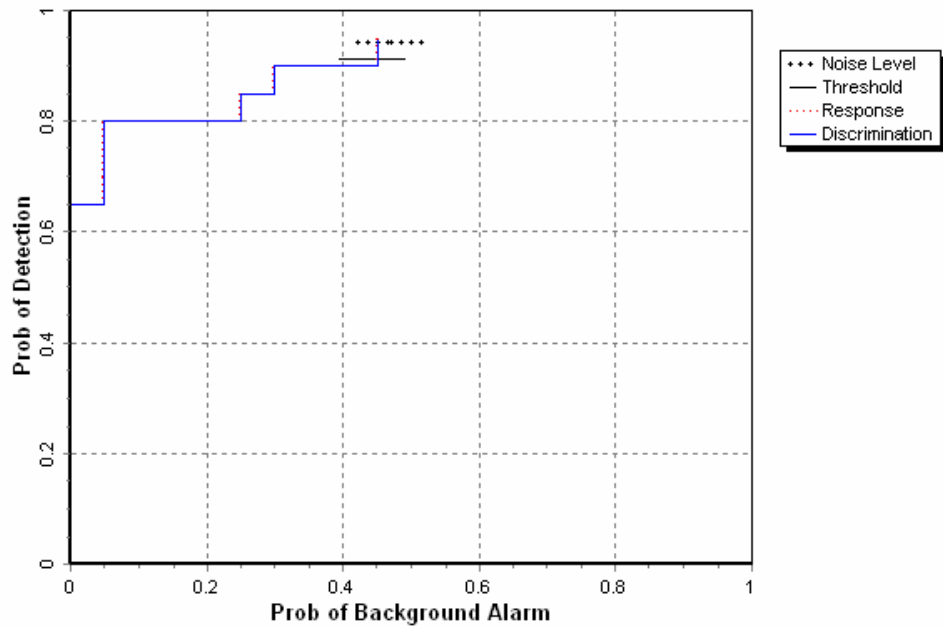


Figure 13. Combined sensor blind grid probability of detection for response and discrimination stages versus their respective probabilities of background alarm for all ordnance larger than 20 mm.

### 4.3 PERFORMANCE SUMMARIES

Results for the Blind Grid test broken out by sensor type, size, depth and nonstandard ordnance are presented in Tables 5a, b, and c (for cost results, see section 5). Results by size and depth include both standard and nonstandard ordnance. The results by size show how well the demonstrator did at detecting/discriminating ordnance of a certain caliber range (see app A for size definitions). The results are relative to the number of ordnance items emplaced.

The RESPONSE STAGE results are derived from the list of anomalies above the demonstrator-provided noise level. The results for the DISCRIMINATION STAGE are derived from the demonstrator's recommended threshold for optimizing UXO field cleanup by minimizing false digs and maximizing ordnance recovery. The lower 90 percent confidence limit on probability of detection and  $P_{fp}$  was calculated assuming that the number of detections and false positives are binomially distributed random variables. All results in Table 5 have been rounded to protect the ground truth. However, lower confidence limits were calculated using actual results.

The overall ground truth is composed of ferrous and non-ferrous anomalies. Due to limitations of the magnetometer, the non-ferrous items cannot be detected. Therefore, the summary presented in Table 5b is split exhibiting results based on the subset of the ground truth that is solely the ferrous anomalies and the full ground truth for comparison purposes.

All other tables presented in this section are based on scoring against the ferrous only ground truth. The response stage noise level and recommended discrimination stage threshold values are provided by the demonstrator.

**TABLE 5a. SUMMARY OF BLIND GRID RESULTS FOR THE PULSE EM**

Metric	Overall	Standard	Nonstandard	By Size			By Depth, m		
				Small	Medium	Large	< 0.3	0.3 to <1	>= 1
RESPONSE STAGE									
P <sub>d</sub>	0.80	0.80	0.90	0.80	0.85	0.85	0.85	0.85	0.55
P <sub>d</sub> Low 90% Conf	0.75	0.68	0.78	0.67	0.73	0.66	0.77	0.69	0.28
P <sub>d</sub> Upper 90% Conf	0.88	0.86	0.96	0.87	0.95	0.96	0.93	0.93	0.83
P <sub>fp</sub>	0.80	-	-	-	-	-	0.80	0.80	N/A
P <sub>fp</sub> Low 90% Conf	0.76	-	-	-	-	-	0.76	0.65	-
P <sub>fp</sub> Upper 90% Conf	0.86	-	-	-	-	-	0.88	0.88	-
P <sub>ba</sub>	0.50	-	-	-	-	-	-	-	-
DISCRIMINATION STAGE									
P <sub>d</sub>	0.80	0.75	0.90	0.75	0.85	0.85	0.85	0.85	0.55
P <sub>d</sub> Low 90% Conf	0.74	0.65	0.78	0.64	0.73	0.66	0.74	0.69	0.28
P <sub>d</sub> Upper 90% Conf	0.87	0.84	0.96	0.85	0.95	0.96	0.91	0.93	0.83
P <sub>fp</sub>	0.80	-	-	-	-	-	0.80	0.80	N/A
P <sub>fp</sub> Low 90% Conf	0.75	-	-	-	-	-	0.75	0.65	-
P <sub>fp</sub> Upper 90% Conf	0.85	-	-	-	-	-	0.87	0.88	-
P <sub>ba</sub>	0.45	-	-	-	-	-	-	-	-

Response Stage Noise Level: 0.53

Recommended Discrimination Stage Threshold: 0.17

**TABLE 5b. SUMMARY OF BLIND GRID RESULTS FOR THE  
SIMULTANEOUS MAGNETOMETRY**

Ferrous only Ground Truth									
Metric	Overall	Standard	Nonstandard	By Size			By Depth, m		
				Small	Medium	Large	< 0.3	0.3 to <1	>= 1
RESPONSE STAGE									
P <sub>d</sub>	0.85	0.85	0.85	0.80	0.90	0.95	0.85	0.95	0.55
P <sub>d</sub> Low 90% Conf	0.79	0.77	0.73	0.65	0.78	0.75	0.76	0.83	0.28
P <sub>d</sub> Upper 90% Conf	0.91	0.93	0.93	0.88	0.98	0.99	0.93	1.00	0.83
P <sub>fp</sub>	0.95	-	-	-	-	-	1.00	0.95	N/A
P <sub>fp</sub> Low 90% Conf	0.94	-	-	-	-	-	0.94	0.87	-
P <sub>fp</sub> Upper 90% Conf	0.99	-	-	-	-	-	0.99	1.00	-
P <sub>ba</sub>	0.30	-	-	-	-	-	-	-	-
DISCRIMINATION STAGE									
P <sub>d</sub>	0.85	0.85	0.85	0.80	0.90	0.95	0.85	0.95	0.55
P <sub>d</sub> Low 90% Conf	0.79	0.77	0.73	0.65	0.78	0.75	0.76	0.83	0.28
P <sub>d</sub> Upper 90% Conf	0.91	0.93	0.93	0.88	0.98	0.99	0.93	1.00	0.83
P <sub>fp</sub>	0.95	-	-	-	-	-	1.00	0.95	N/A
P <sub>fp</sub> Low 90% Conf	0.94	-	-	-	-	-	0.94	0.87	-
P <sub>fp</sub> Upper 90% Conf	0.99	-	-	-	-	-	0.99	1.00	-
P <sub>ba</sub>	0.30	-	-	-	-	-	-	-	-
(Full Ground truth)									
Metric	Overall	Standard	Nonstandard	By Size			By Depth, m		
				Small	Medium	Large	< 0.3	0.3 to <1	>= 1
RESPONSE STAGE									
P <sub>d</sub>	0.80	0.80	0.85	0.70	0.90	0.95	0.75	0.90	0.55
P <sub>d</sub> Low 90% Conf	0.72	0.68	0.70	0.56	0.78	0.75	0.66	0.79	0.28
P <sub>d</sub> Upper 90% Conf	0.86	0.86	0.91	0.78	0.98	0.99	0.85	0.98	0.83
P <sub>fp</sub>	0.95	-	-	-	-	-	1.00	0.95	N/A
P <sub>fp</sub> Low 90% Conf	0.94	-	-	-	-	-	0.94	0.87	-
P <sub>fp</sub> Upper 90% Conf	0.99	-	-	-	-	-	0.99	1.00	-
P <sub>ba</sub>	0.30	-	-	-	-	-	-	-	-
DISCRIMINATION STAGE									
P <sub>d</sub>	0.80	0.80	0.85	0.70	0.90	0.95	0.75	0.90	0.55
P <sub>d</sub> Low 90% Conf	0.72	0.68	0.70	0.56	0.78	0.75	0.66	0.79	0.28
P <sub>d</sub> Upper 90% Conf	0.86	0.86	0.91	0.78	0.98	0.99	0.85	0.98	0.83
P <sub>fp</sub>	0.95	-	-	-	-	-	1.00	0.95	N/A
P <sub>fp</sub> Low 90% Conf	0.94	-	-	-	-	-	0.94	0.87	-
P <sub>fp</sub> Upper 90% Conf	0.99	-	-	-	-	-	0.99	1.00	-
P <sub>ba</sub>	0.30	-	-	-	-	-	-	-	-

Response Stage Noise Level: 3.84

Recommended Discrimination Stage Threshold: 2.44

**TABLE 5c. SUMMARY OF BLIND GRID RESULTS FOR THE  
COMBINED SENSOR RESULTS**

Metric	Overall	Standard	Nonstandard	By Size			By Depth, m		
				Small	Medium	Large	< 0.3	0.3 to <1	>= 1
RESPONSE STAGE									
P <sub>d</sub>	0.95	0.95	0.95	0.95	0.95	0.95	1.00	0.95	0.70
P <sub>d</sub> Low 90% Conf	0.89	0.86	0.87	0.86	0.84	0.75	0.91	0.85	0.40
P <sub>d</sub> Upper 90% Conf	0.98	0.98	1.00	0.99	1.00	0.99	1.00	1.00	0.92
P <sub>fp</sub>	1.00	-	-	-	-	-	1.00	1.00	N/A
P <sub>fp</sub> Low 90% Conf	0.97	-	-	-	-	-	0.96	0.92	-
P <sub>fp</sub> Upper 90% Conf	1.00	-	-	-	-	-	1.00	1.00	-
P <sub>ba</sub>	0.45	-	-	-	-	-	-	-	-
DISCRIMINATION STAGE									
P <sub>d</sub>	0.90	0.90	0.95	0.90	0.90	0.95	0.95	0.90	0.70
P <sub>d</sub> Low 90% Conf	0.86	0.83	0.83	0.83	0.78	0.75	0.88	0.79	0.40
P <sub>d</sub> Upper 90% Conf	0.96	0.96	0.98	0.97	0.98	0.99	0.99	0.98	0.92
P <sub>fp</sub>	1.00	-	-	-	-	-	1.00	1.00	N/A
P <sub>fp</sub> Low 90% Conf	0.97	-	-	-	-	-	0.96	0.92	-
P <sub>fp</sub> Upper 90% Conf	1.00	-	-	-	-	-	1.00	1.00	-
P <sub>ba</sub>	0.45	-	-	-	-	-	-	-	-

Response Stage Noise Level: 0.74

Recommended Discrimination Stage Threshold: -0.04

Note: The recommended discrimination stage threshold values are provided by the demonstrator.

#### **4.4 EFFICIENCY, REJECTION RATES, AND TYPE CLASSIFICATION** (All results based on combined EM/MAG data set)

Efficiency and rejection rates are calculated to quantify the discrimination ability at specific points of interest on the ROC curve: (1) at the point where no decrease in P<sub>d</sub> is suffered (i.e., the efficiency is by definition equal to one) and (2) at the operator selected threshold. These values are reported in Table 6.

**TABLE 6. EFFICIENCY AND REJECTION RATES**

	<b>Efficiency (E)</b>	<b>False Positive Rejection Rate</b>	<b>Background Alarm Rejection Rate</b>
At Operating Point	0.97	0.00	0.06
With No Loss of P <sub>d</sub>	1.00	0.00	0.01

At the demonstrator's recommended setting, the ordnance items that were detected and correctly discriminated were further scored on whether their correct type could be identified (table 7). Correct type examples include "20-mm projectile, 105-mm HEAT Projectile, and 2.75-inch Rocket". A list of the standard type declaration required for each ordnance item was provided to demonstrators prior to testing. For example, the standard type for the three example items are 20mmP, 105H, and 2.75in, respectively.

**TABLE 7. CORRECT TYPE CLASSIFICATION  
OF TARGETS CORRECTLY  
DISCRIMINATED AS UXO**

Size	Percentage Correct
Small	N/A
Medium	N/A
Large	N/A
Overall	N/A

#### **4.5 LOCATION ACCURACY**

The mean location error and standard deviations appear in Table 8. These calculations are based on average missed depth for ordnance correctly identified in the discrimination stage. Depths are measured from the closest point of the ordnance to the surface. For the Blind Grid, only depth errors are calculated, since (X, Y) positions are known to be the centers of each grid square.

**TABLE 8. MEAN LOCATION ERROR AND  
STANDARD DEVIATION (M)**

	Mean	Standard Deviation
Depth	N/A	N/A

Note: Demonstrator did not attempt to declare depth of detection.

## **SECTION 5. ON-SITE LABOR COSTS**

A standardized estimate for labor costs associated with this effort was calculated as follows: the first person at the test site was designated “supervisor”, the second person was designated “data analyst”, and the third and following personnel were considered “field support”. Standardized hourly labor rates were charged by title: supervisor at \$95.00/hour, data analyst at \$57.00/hour, and field support at \$28.50/hour.

Government representatives monitored on-site activity. All on-site activities were grouped into one of ten categories: initial setup/mobilization, daily setup/stop, calibration, collecting data, downtime due to break/lunch, downtime due to equipment failure, downtime due to equipment/data checks or maintenance, downtime due to weather, downtime due to demonstration site issue, or demobilization. See Appendix D for the daily activity log. See section 3.4 for a summary of field activities.

The standardized cost estimate associated with the labor needed to perform the field activities is presented in Table 9. Note that calibration time includes time spent in the Calibration Lanes as well as field calibrations. “Site survey time” includes daily setup/stop time, collecting data, breaks/lunch, downtime due to equipment/data checks or maintenance, downtime due to failure, and downtime due to weather.

**TABLE 9. ON-SITE LABOR COSTS**

	<b>No. People</b>	<b>Hourly Wage</b>	<b>Hours</b>	<b>Cost</b>
<b>Initial Setup</b>				
Supervisor	1	\$95.00	7.83	\$743.85
Data Analyst	1	57.00	7.83	446.31
Field Support	0	28.50	7.83	0.00
SubTotal				<b>\$1190.16</b>
<b>Calibration</b>				
Supervisor	1	\$95.00	4.20	\$399.00
Data Analyst	1	57.00	4.20	239.40
Field Support	0	28.50	4.20	0.00
SubTotal				<b>\$638.40</b>
<b>Site Survey</b>				
Supervisor	1	\$95.00	2.0	\$190.00
Data Analyst	1	57.00	2.0	114.00
Field Support	0	28.50	2.0	0.00
SubTotal				<b>\$304.00</b>

See notes at end of table.

**TABLE 9 (CONT'D)**

	<b>No. People</b>	<b>Hourly Wage</b>	<b>Hours</b>	<b>Cost</b>
<b>Demobilization</b>				
Supervisor	1	\$95.00	1.72	\$163.40
Data Analyst	1	57.00	1.72	98.04
Field Support	0	28.50	1.72	0.00
Subtotal				<b>\$261.44</b>
Total				<b>\$2,394.00</b>

Notes: Calibration time includes time spent in the Calibration Lanes as well as calibration before each data run.

Site Survey time includes daily setup/stop time, collecting data, breaks/lunch, downtime due to system maintenance, failure, and weather.

## **SECTION 6. COMPARISON OF RESULTS TO DATE**

No comparisons to date.

## **SECTION 7. APPENDIXES**

### **APPENDIX A. TERMS AND DEFINITIONS**

#### **GENERAL DEFINITIONS**

**Anomaly:** Location of a system response deemed to warrant further investigation by the demonstrator for consideration as an emplaced ordnance item.

**Detection:** An anomaly location that is within  $R_{\text{halo}}$  of an emplaced ordnance item.

**Emplaced Ordnance:** An ordnance item buried by the government at a specified location in the test site.

**Emplaced Clutter:** A clutter item (i.e., non-ordnance item) buried by the government at a specified location in the test site.

**$R_{\text{halo}}$ :** A pre-determined radius about the periphery of an emplaced item (clutter or ordnance) within which a location identified by the demonstrator as being of interest is considered to be a response from that item. If multiple declarations lie within  $R_{\text{halo}}$  of any item (clutter or ordnance), the declaration with the highest signal output within the  $R_{\text{halo}}$  will be utilized. For the purpose of this program, a circular halo 0.5 meters in radius will be placed around the center of the object for all clutter and ordnance items less than 0.6 meters in length. When ordnance items are longer than 0.6 meters, the halo becomes an ellipse where the minor axis remains 1 meter and the major axis is equal to the length of the ordnance plus 1 meter.

**Small Ordnance:** Caliber of ordnance less than or equal to 40 mm (includes 20-mm projectile, 40-mm projectile, submunitions BLU-26, BLU-63, and M42).

**Medium Ordnance:** Caliber of ordnance greater than 40 mm and less than or equal to 81 mm (includes 57-mm projectile, 60-mm mortar, 2.75 in. Rocket, MK118 Rockeye, 81-mm mortar).

**Large Ordnance:** Caliber of ordnance greater than 81 mm (includes 105-mm HEAT, 105-mm projectile, 155-mm projectile, 500-pound bomb).

**Shallow:** Items buried less than 0.3 meter below ground surface.

**Medium:** Items buried greater than or equal to 0.3 meter and less than 1 meter below ground surface.

**Deep:** Items buried greater than or equal to 1 meter below ground surface.

**Response Stage Noise Level:** The level that represents the point below which anomalies are not considered detectable. Demonstrators are required to provide the recommended noise level for the Blind Grid test area.

**Discrimination Stage Threshold:** The demonstrator selected threshold level that they believe provides optimum performance of the system by retaining all detectable ordnance and rejecting the maximum amount of clutter. This level defines the subset of anomalies the demonstrator would recommend digging based on discrimination.

**Binomially Distributed Random Variable:** A random variable of the type which has only two possible outcomes, say success and failure, is repeated for  $n$  independent trials with the probability  $p$  of success and the probability  $1-p$  of failure being the same for each trial. The number of successes  $x$  observed in the  $n$  trials is an estimate of  $p$  and is considered to be a binomially distributed random variable.

## RESPONSE AND DISCRIMINATION STAGE DATA

The scoring of the demonstrator's performance is conducted in two stages. These two stages are termed the RESPONSE STAGE and DISCRIMINATION STAGE. For both stages, the probability of detection ( $P_d$ ) and the false alarms are reported as receiver operating characteristic (ROC) curves. False alarms are divided into those anomalies that correspond to emplaced clutter items, measuring the probability of false positive ( $P_{fp}$ ) and those that do not correspond to any known item, termed background alarms.

The RESPONSE STAGE scoring evaluates the ability of the system to detect emplaced targets without regard to ability to discriminate ordnance from other anomalies. For the RESPONSE STAGE, the demonstrator provides the scoring committee with the location and signal strength of all anomalies that the demonstrator has deemed sufficient to warrant further investigation and/or processing as potential emplaced ordnance items. This list is generated with minimal processing (e.g., this list will include all signals above the system noise threshold). As such, it represents the most inclusive list of anomalies.

The DISCRIMINATION STAGE evaluates the demonstrator's ability to correctly identify ordnance as such, and to reject clutter. For the same locations as in the RESPONSE STAGE anomaly list, the DISCRIMINATION STAGE list contains the output of the algorithms applied in the discrimination-stage processing. This list is prioritized based on the demonstrator's determination that an anomaly location is likely to contain ordnance. Thus, higher output values are indicative of higher confidence that an ordnance item is present at the specified location. For electronic signal processing, priority ranking is based on algorithm output. For other systems, priority ranking is based on human judgment. The demonstrator also selects the threshold that the demonstrator believes will provide "optimum" system performance, (i.e., that retains all the detected ordnance and rejects the maximum amount of clutter).

**Note:** The two lists provided by the demonstrator contain identical numbers of potential target locations. They differ only in the priority ranking of the declarations.

## RESPONSE STAGE DEFINITIONS

Response Stage Probability of Detection ( $P_d^{\text{res}}$ ):  $P_d^{\text{res}} = (\text{No. of response-stage detections})/(\text{No. of emplaced ordnance in the test site})$ .

Response Stage False Positive ( $fp^{\text{res}}$ ): An anomaly location that is within  $R_{\text{halo}}$  of an emplaced clutter item.

Response Stage Probability of False Positive ( $P_{fp}^{\text{res}}$ ):  $P_{fp}^{\text{res}} = (\text{No. of response-stage false positives})/(\text{No. of emplaced clutter items})$ .

Response Stage Background Alarm ( $ba^{\text{res}}$ ): An anomaly in a blind grid cell that contains neither emplaced ordnance nor an emplaced clutter item. An anomaly location in the open field or scenarios that is outside  $R_{\text{halo}}$  of any emplaced ordnance or emplaced clutter item.

Response Stage Probability of Background Alarm ( $P_{ba}^{\text{res}}$ ): Blind Grid only:  $P_{ba}^{\text{res}} = (\text{No. of response-stage background alarms})/(\text{No. of empty grid locations})$ .

Response Stage Background Alarm Rate ( $BAR^{\text{res}}$ ): Open Field only:  $BAR^{\text{res}} = (\text{No. of response-stage background alarms})/(\text{arbitrary constant})$ .

Note that the quantities  $P_d^{\text{res}}$ ,  $P_{fp}^{\text{res}}$ ,  $P_{ba}^{\text{res}}$ , and  $BAR^{\text{res}}$  are functions of  $t^{\text{res}}$ , the threshold applied to the response-stage signal strength. These quantities can therefore be written as  $P_d^{\text{res}}(t^{\text{res}})$ ,  $P_{fp}^{\text{res}}(t^{\text{res}})$ ,  $P_{ba}^{\text{res}}(t^{\text{res}})$ , and  $BAR^{\text{res}}(t^{\text{res}})$ .

## DISCRIMINATION STAGE DEFINITIONS

Discrimination: The application of a signal processing algorithm or human judgment to response-stage data that discriminates ordnance from clutter. Discrimination should identify anomalies that the demonstrator has high confidence correspond to ordnance, as well as those that the demonstrator has high confidence correspond to non-ordnance or background returns. The former should be ranked with highest priority and the latter with lowest.

Discrimination Stage Probability of Detection ( $P_d^{\text{disc}}$ ):  $P_d^{\text{disc}} = (\text{No. of discrimination-stage detections})/(\text{No. of emplaced ordnance in the test site})$ .

Discrimination Stage False Positive ( $fp^{\text{disc}}$ ): An anomaly location that is within  $R_{\text{halo}}$  of an emplaced clutter item.

Discrimination Stage Probability of False Positive ( $P_{fp}^{\text{disc}}$ ):  $P_{fp}^{\text{disc}} = (\text{No. of discrimination stage false positives})/(\text{No. of emplaced clutter items})$ .

Discrimination Stage Background Alarm ( $ba^{\text{disc}}$ ): An anomaly in a blind grid cell that contains neither emplaced ordnance nor an emplaced clutter item. An anomaly location in the open field or scenarios that is outside  $R_{\text{halo}}$  of any emplaced ordnance or emplaced clutter item.

Discrimination Stage Probability of Background Alarm ( $P_{ba}^{disc}$ ):  $P_{ba}^{disc} = (\text{No. of discrimination-stage background alarms})/(\text{No. of empty grid locations})$ .

Discrimination Stage Background Alarm Rate ( $BAR^{disc}$ ):  $BAR^{disc} = (\text{No. of discrimination-stage background alarms})/(\text{arbitrary constant})$ .

Note that the quantities  $P_d^{disc}$ ,  $P_{fp}^{disc}$ ,  $P_{ba}^{disc}$ , and  $BAR^{disc}$  are functions of  $t^{disc}$ , the threshold applied to the discrimination-stage signal strength. These quantities can therefore be written as  $P_d^{disc}(t^{disc})$ ,  $P_{fp}^{disc}(t^{disc})$ ,  $P_{ba}^{disc}(t^{disc})$ , and  $BAR^{disc}(t^{disc})$ .

## RECEIVER-OPERATING CHARACTERISTIC (ROC) CURVES

ROC curves at both the response and discrimination stages can be constructed based on the above definitions. The ROC curves plot the relationship between  $P_d$  versus  $P_{fp}$  and  $P_d$  versus  $BAR$  or  $P_{ba}$  as the threshold applied to the signal strength is varied from its minimum ( $t_{min}$ ) to its maximum ( $t_{max}$ ) value.<sup>1</sup> Figure A-1 shows how  $P_d$  versus  $P_{fp}$  and  $P_d$  versus  $BAR$  are combined into ROC curves. Note that the “res” and “disc” superscripts have been suppressed from all the variables for clarity.

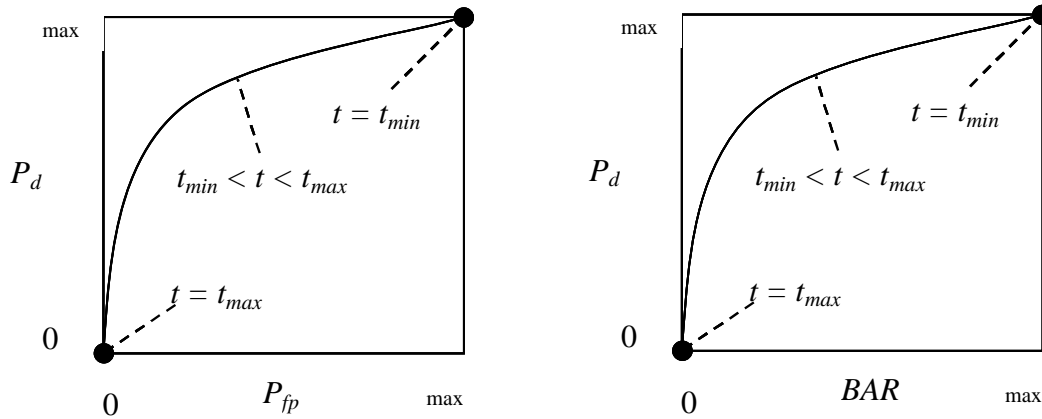


Figure A-1. ROC curves for open field testing. Each curve applies to both the response and discrimination stages.

<sup>1</sup>Strictly speaking, ROC curves plot the  $P_d$  versus  $P_{ba}$  over a pre-determined and fixed number of detection opportunities (some of the opportunities are located over ordnance and others are located over clutter or blank spots). In an open field scenario, each system suppresses its signal strength reports until some bare-minimum signal response is received by the system. Consequently, the open field ROC curves do not have information from low signal-output locations, and, furthermore, different contractors report their signals over a different set of locations on the ground. These ROC curves are thus not true to the strict definition of ROC curves as defined in textbooks on detection theory. Note, however, that the ROC curves obtained in the Blind Grid test sites are true ROC curves.

## METRICS TO CHARACTERIZE THE DISCRIMINATION STAGE

The demonstrator is also scored on efficiency and rejection ratio, which measure the effectiveness of the discrimination stage processing. The goal of discrimination is to retain the greatest number of ordnance detections from the anomaly list, while rejecting the maximum number of anomalies arising from non-ordnance items. The efficiency measures the amount of detected ordnance retained by the discrimination, while the rejection ratio measures the fraction of false alarms rejected. Both measures are defined relative to the entire response list, i.e., the maximum ordnance detectable by the sensor and its accompanying false positive rate or background alarm rate.

Efficiency (E):  $E = P_d^{disc}(t^{disc})/P_d^{res}(t_{min}^{res})$ ; Measures (at a threshold of interest), the degree to which the maximum theoretical detection performance of the sensor system (as determined by the response stage  $t_{min}$ ) is preserved after application of discrimination techniques. Efficiency is a number between 0 and 1. An efficiency of 1 implies that all of the ordnance initially detected in the response stage was retained at the specified threshold in the discrimination stage,  $t^{disc}$ .

False Positive Rejection Rate ( $R_{fp}$ ):  $R_{fp} = 1 - [P_{fp}^{disc}(t^{disc})/P_{fp}^{res}(t_{min}^{res})]$ ; Measures (at a threshold of interest), the degree to which the sensor system's false positive performance is improved over the maximum false positive performance (as determined by the response stage  $t_{min}$ ). The rejection rate is a number between 0 and 1. A rejection rate of 1 implies that all emplaced clutter initially detected in the response stage were correctly rejected at the specified threshold in the discrimination stage.

Background Alarm Rejection Rate ( $R_{ba}$ ):

Blind Grid:  $R_{ba} = 1 - [P_{ba}^{disc}(t^{disc})/P_{ba}^{res}(t_{min}^{res})]$ .

Open Field:  $R_{ba} = 1 - [BAR^{disc}(t^{disc})/BAR^{res}(t_{min}^{res})]$ .

Measures the degree to which the discrimination stage correctly rejects background alarms initially detected in the response stage. The rejection rate is a number between 0 and 1. A rejection rate of 1 implies that all background alarms initially detected in the response stage were rejected at the specified threshold in the discrimination stage.

## CHI-SQUARE COMPARISON EXPLANATION:

The Chi-square test for differences in probabilities (or 2 x 2 contingency table) is used to analyze two samples drawn from two different populations to see if both populations have the same or different proportions of elements in a certain category. More specifically, two random samples are drawn, one from each population, to test the null hypothesis that the probability of event A (some specified event) is the same for both populations (ref 3).

A 2 x 2 contingency table is used in the Standardized UXO Technology Demonstration Site Program to determine if there is reason to believe that the proportion of ordnance correctly detected/discriminated by demonstrator X's system is significantly degraded by the more challenging terrain feature introduced. The test statistic of the 2 x 2 contingency table is the

Chi-square distribution with one degree of freedom. Since an association between the more challenging terrain feature and relatively degraded performance is sought, a one-sided test is performed. A significance level of 0.05 is chosen which sets a critical decision limit of 2.71 from the Chi-square distribution with one degree of freedom. It is a critical decision limit because if the test statistic calculated from the data exceeds this value, the two proportions tested will be considered significantly different. If the test statistic calculated from the data is less than this value, the two proportions tested will be considered not significantly different.

An exception must be applied when either a 0 or 100 percent success rate occurs in the sample data. The Chi-square test cannot be used in these instances. Instead, Fischer's test is used and the critical decision limit for one-sided tests is the chosen significance level, which in this case is 0.05. With Fischer's test, if the test statistic is less than the critical value, the proportions are considered to be significantly different.

Standardized UXO Technology Demonstration Site examples, where blind grid results are compared to those from the open field and open field results are compared to those from one of the scenarios, follow. It should be noted that a significant result does not prove a cause and effect relationship exists between the two populations of interest; however, it does serve as a tool to indicate that one data set has experienced a degradation in system performance at a large enough level than can be accounted for merely by chance or random variation. Note also that a result that is not significant indicates that there is not enough evidence to declare that anything more than chance or random variation within the same population is at work between the two data sets being compared.

Demonstrator X achieves the following overall results after surveying each of the three progressively more difficult areas using the same system (results indicate the number of ordnance detected divided by the number of ordnance emplaced):

	Blind Grid	Open Field	Moguls
$P_d^{\text{res}}$	100/100 = 1.0	8/10 = .80	20/33 = .61
$P_d^{\text{disc}}$	80/100 = 0.80	6/10 = .60	8/33 = .24

$P_d^{\text{res}}$ : BLIND GRID versus OPEN FIELD. Using the example data above to compare probabilities of detection in the response stage, all 100 ordnance out of 100 emplaced ordnance items were detected in the blind grid while 8 ordnance out of 10 emplaced were detected in the open field. Fischer's test must be used since a 100 percent success rate occurs in the data. Fischer's test uses the four input values to calculate a test statistic of 0.0075 that is compared against the critical value of 0.05. Since the test statistic is less than the critical value, the smaller response stage detection rate (0.80) is considered to be significantly less at the 0.05 level of significance. While a significant result does not prove a cause and effect relationship exists between the change in survey area and degradation in performance, it does indicate that the detection ability of demonstrator X's system seems to have been degraded in the open field relative to results from the blind grid using the same system.

$P_d^{disc}$ : BLIND GRID versus OPEN FIELD. Using the example data above to compare probabilities of detection in the discrimination stage, 80 out of 100 emplaced ordnance items were correctly discriminated as ordnance in blind grid testing while 6 ordnance out of 10 emplaced were correctly discriminated as such in open field-testing. Those four values are used to calculate a test statistic of 1.12. Since the test statistic is less than the critical value of 2.71, the two discrimination stage detection rates are considered to be not significantly different at the 0.05 level of significance.

$P_d^{res}$ : OPEN FIELD versus MOGULS. Using the example data above to compare probabilities of detection in the response stage, 8 out of 10 and 20 out of 33 are used to calculate a test statistic of 0.56. Since the test statistic is less than the critical value of 2.71, the two response stage detection rates are considered to be not significantly different at the 0.05 level of significance.

$P_d^{disc}$ : OPEN FIELD versus MOGULS. Using the example data above to compare probabilities of detection in the discrimination stage, 6 out of 10 and 8 out of 33 are used to calculate a test statistic of 2.98. Since the test statistic is greater than the critical value of 2.71, the smaller discrimination stage detection rate is considered to be significantly less at the 0.05 level of significance. While a significant result does not prove a cause and effect relationship exists between the change in survey area and degradation in performance, it does indicate that the ability of demonstrator X to correctly discriminate seems to have been degraded by the mogul terrain relative to results from the flat open field using the same system.

## APPENDIX B. DAILY WEATHER LOGS

TABLE B-1. WEATHER LOG

18 May 2004		
Time	Temperature °C	Precipitation (in.)
07:00	23.9	0.00
08:00	26.4	0.00
09:00	27.3	0.00
10:00	28.6	0.00
11:00	30.1	0.00
12:00	31.6	0.00
13:00	32.7	0.00
14:00	33.4	0.00
15:00	33.6	0.00
16:00	34.3	0.00
17:00	34.5	0.00

19 May 2004		
Time	Temperature °C	Precipitation (in.)
07:00	24.5	0.00
08:00	26.2	0.00
09:00	27.5	0.00
10:00	29.0	0.00
11:00	30.6	0.00
12:00	31.6	0.00
13:00	32.2	0.00
14:00	32.9	0.00
15:00	33.7	0.00
16:00	33.8	0.00
17:00	34.0	0.00

<b>20 May 2004</b>		
<b>Time</b>	<b>Temperature °C</b>	<b>Precipitation (in.)</b>
07:00	32.4	0.00
08:00	24.6	0.00
09:00	26.3	0.00
10:00	28.3	0.00
11:00	29.5	0.00
12:00	30.5	0.00
13:00	31.3	0.00
14:00	32.0	0.00
15:00	32.5	0.00
16:00	32.9	0.00
17:00	32.7	0.00

<b>21 May 2004</b>		
<b>Time</b>	<b>Temperature °C</b>	<b>Precipitation (in.)</b>
07:00	20.3	0.00
08:00	21.8	0.00
09:00	23.4	0.00
10:00	25.5	0.00
11:00	27.2	0.00
12:00	28.1	0.00
13:00	29.1	0.00
14:00	30.0	0.00
15:00	30.7	0.00
16:00	30.7	0.00
17:00	30.7	0.00

<b>22 May 2004</b>		
<b>Time</b>	<b>Temperature °C</b>	<b>Precipitation (in.)</b>
07:00	18.6	0.00
08:00	20.4	0.00
09:00	21.8	0.00
10:00	23.8	0.00
11:00	25.2	0.00
12:00	26.4	0.00
13:00	27.4	0.00
14:00	29.1	0.00
15:00	29.6	0.00
16:00	30.4	0.00
17:00	30.5	0.00

<b>24 May 2004</b>		
<b>Time</b>	<b>Temperature °C</b>	<b>Precipitation (in.)</b>
07:00	20.3	0.00
08:00	24.7	0.00
09:00	26.6	0.00
10:00	27.0	0.00
11:00	28.2	0.00
12:00	28.8	0.00
13:00	30.4	0.00
14:00	30.8	0.00
15:00	31.5	0.00
16:00	31.7	0.00
17:00	31.6	0.00

<b>25 May 2004</b>		
<b>Time</b>	<b>Temperature °C</b>	<b>Precipitation (in.)</b>
07:00	21.8	0.00
08:00	23.3	0.00
09:00	24.5	0.00
10:00	27.4	0.00
11:00	28.7	0.00
12:00	29.6	0.00
13:00	30.8	0.00
14:00	31.1	0.00
15:00	31.6	0.00
16:00	32.2	0.00
17:00	32.4	0.00

<b>26 May 2004</b>		
<b>Time</b>	<b>Temperature °C</b>	<b>Precipitation (in.)</b>
07:00	20.2	0.00
08:00	21.2	0.00
09:00	23.1	0.00
10:00	24.8	0.00
11:00	26.2	0.00
12:00	27.2	0.00
13:00	29.5	0.00
14:00	30.3	0.00
15:00	30.9	0.00
16:00	31.2	0.00
17:00	31.1	0.00

<b>27 May 2004</b>		
<b>Time</b>	<b>Temperature °C</b>	<b>Precipitation (in.)</b>
07:00	21.1	0.00
08:00	24.2	0.00
09:00	25.3	0.00
10:00	26.7	0.00
11:00	28.8	0.00
12:00	30.5	0.00
13:00	32.4	0.00
14:00	33.6	0.00
15:00	34.5	0.00
16:00	34.5	0.00
17:00	34.8	0.00

<b>28 May 2004</b>		
<b>Time</b>	<b>Temperature °C</b>	<b>Precipitation (in.)</b>
07:00	23.7	0.00
08:00	26.4	0.00
09:00	28.9	0.00
10:00	30.7	0.00
11:00	32.5	0.00
12:00	33.1	0.00
13:00	33.6	0.00
14:00	33.9	0.00
15:00	34.3	0.00
16:00	34.6	0.00
17:00	34.7	0.00

## APPENDIX C. SOIL MOISTURE

### Demonstrator BLACKHAWK

Date: May 18, 2004

Times: 0950 hours, 1200 hours

Probe Location:	Layer, in.	AM Reading, %	PM Reading, %
Calibration Area	0 to 6	1.5	1.5
	6 to 12	2.2	2.2
	12 to 24	3.9	3.9
	24 to 36	3.6	3.6
	36 to 48	4.0	4.0
Mogul Area	0 to 6	1.7	1.7
	6 to 12	2.0	2.0
	12 to 24	3.7	3.7
	24 to 36	4.0	4.0
	36 to 48	4.0	4.0
Desert Extreme Area	0 to 6	1.5	1.5
	6 to 12	2.1	2.2
	12 to 24	3.5	3.5
	24 to 36	4.0	4.0
	36 to 48	4.1	4.1

Date: May 19, 2004

Times: 0630 hours, 1200 hours

Probe Location:	Layer, in.	AM Reading, %	PM Reading, %
Calibration Area	0 to 6	1.6	1.6
	6 to 12	2.2	2.2
	12 to 24	3.9	3.9
	24 to 36	3.6	3.6
	36 to 48	4.0	4.0
Mogul Area	0 to 6	1.7	1.7
	6 to 12	2.0	2.0
	12 to 24	3.6	3.6
	24 to 36	4.0	4.0
	36 to 48	4.0	4.0
Desert Extreme Area	0 to 6	1.6	1.6
	6 to 12	2.1	2.1
	12 to 24	3.5	3.5
	24 to 36	4.0	4.0
	36 to 48	4.1	4.1

Date: May 20, 2004  
 Times: 0615 hours, 1230 hours

<b>Probe Location:</b>	<b>Layer, in.</b>	<b>AM Reading, %</b>	<b>PM Reading, %</b>
Calibration Area	0 to 6	1.5	1.5
	6 to 12	2.3	2.4
	12 to 24	3.9	3.9
	24 to 36	3.6	3.6
	36 to 48	4.0	4.0
Mogul Area	0 to 6	1.7	1.7
	6 to 12	2.0	2.0
	12 to 24	3.7	3.7
	24 to 36	4.0	4.0
	36 to 48	4.0	4.0
Desert Extreme Area	0 to 6	1.5	1.5
	6 to 12	2.1	2.1
	12 to 24	3.5	3.5
	24 to 36	4.0	4.0
	36 to 48	4.1	4.1

Date: May 21, 2004  
 Times: 0615 hours, 1130 hours

<b>Probe Location:</b>	<b>Layer, in.</b>	<b>AM Reading, %</b>	<b>PM Reading, %</b>
Calibration Area	0 to 6	1.5	1.5
	6 to 12	2.2	2.2
	12 to 24	3.9	3.9
	24 to 36	3.6	3.6
	36 to 48	4.0	4.0
Mogul Area	0 to 6	1.7	1.7
	6 to 12	2.0	2.0
	12 to 24	3.7	3.7
	24 to 36	4.0	4.0
	36 to 48	4.0	4.0
Desert Extreme Area	0 to 6	1.5	1.5
	6 to 12	2.1	2.2
	12 to 24	3.5	3.5
	24 to 36	4.0	4.0
	36 to 48	4.1	4.1

Date: May 22, 2004

Times: 0610 hours, 1100 hours

<b>Probe Location:</b>	<b>Layer, in.</b>	<b>AM Reading, %</b>	<b>PM Reading, %</b>
Calibration Area	0 to 6	1.6	1.6
	6 to 12	2.2	2.2
	12 to 24	3.8	3.8
	24 to 36	3.6	3.6
	36 to 48	4.0	4.0
Mogul Area	0 to 6	1.5	1.5
	6 to 12	2.2	2.2
	12 to 24	3.6	3.6
	24 to 36	4.0	4.0
	36 to 48	4.0	4.0
Desert Extreme Area	0 to 6	1.7	1.7
	6 to 12	2.0	2.0
	12 to 24	3.5	3.5
	24 to 36	4.0	4.0
	36 to 48	4.1	4.1

Date: May 24, 2004

Times: 0745 hours, 1145 hours

<b>Probe Location:</b>	<b>Layer, in.</b>	<b>AM Reading, %</b>	<b>PM Reading, %</b>
Calibration Area	0 to 6	1.6	1.6
	6 to 12	2.2	2.2
	12 to 24	3.8	3.8
	24 to 36	3.6	3.6
	36 to 48	4.0	4.0
Mogul Area	0 to 6	1.5	1.5
	6 to 12	2.1	2.1
	12 to 24	3.7	3.7
	24 to 36	4.0	4.0
	36 to 48	4.0	4.0
Desert Extreme Area	0 to 6	1.7	1.7
	6 to 12	2.1	2.1
	12 to 24	3.5	3.5
	24 to 36	4.0	4.0
	36 to 48	4.0	4.1

Date: May 25, 2004

Times: 0630 hours, 1200 hours

<b>Probe Location:</b>	<b>Layer, in.</b>	<b>AM Reading, %</b>	<b>PM Reading, %</b>
Calibration Area	0 to 6	1.6	1.6
	6 to 12	2.2	2.2
	12 to 24	3.9	3.9
	24 to 36	3.6	3.6
	36 to 48	4.0	4.0
Mogul Area	0 to 6	1.5	1.5
	6 to 12	2.1	2.1
	12 to 24	3.7	3.7
	24 to 36	4.0	4.0
	36 to 48	4.0	4.0
Desert Extreme Area	0 to 6	1.7	1.7
	6 to 12	2.1	2.1
	12 to 24	3.5	3.5
	24 to 36	4.0	4.0
	36 to 48	4.1	4.1

Date: May 26, 2004

Times: 0550 hours, 1230 hours

<b>Probe Location:</b>	<b>Layer, in.</b>	<b>AM Reading, %</b>	<b>PM Reading, %</b>
Calibration Area	0 to 6	1.6	1.6
	6 to 12	2.1	2.1
	12 to 24	3.9	3.9
	24 to 36	3.6	3.6
	36 to 48	4.0	4.0
Mogul Area	0 to 6	1.6	1.6
	6 to 12	2.1	2.1
	12 to 24	3.7	3.7
	24 to 36	4.0	4.0
	36 to 48	4.0	4.0
Desert Extreme Area	0 to 6	1.7	1.7
	6 to 12	2.1	2.1
	12 to 24	3.5	3.5
	24 to 36	4.0	4.0
	36 to 48	4.1	4.1

Date: May 27, 2004  
 Times: 0625 hours, 1130 hours

<b>Probe Location:</b>	<b>Layer, in.</b>	<b>AM Reading, %</b>	<b>PM Reading, %</b>
Calibration Area	0 to 6	1.6	1.6
	6 to 12	2.3	2.3
	12 to 24	3.9	3.9
	24 to 36	3.6	3.6
	36 to 48	4.0	4.0
Mogul Area	0 to 6	1.6	1.6
	6 to 12	2.1	2.1
	12 to 24	3.7	3.7
	24 to 36	4.0	4.0
	36 to 48	4.0	4.0
Desert Extreme Area	0 to 6	1.7	1.7
	6 to 12	2.1	2.1
	12 to 24	3.5	3.5
	24 to 36	4.0	4.0
	36 to 48	4.1	4.1

Date: May 28, 2004  
 Times: 0610 hours, 1100 hours

<b>Probe Location:</b>	<b>Layer, in.</b>	<b>AM Reading, %</b>	<b>PM Reading, %</b>
Calibration Area	0 to 6	1.6	1.6
	6 to 12	2.3	2.3
	12 to 24	3.9	3.9
	24 to 36	3.6	3.6
	36 to 48	4.0	4.0
Mogul Area	0 to 6	1.6	1.6
	6 to 12	2.1	2.1
	12 to 24	3.7	3.7
	24 to 36	4.0	4.0
	36 to 48	4.0	4.0
Desert Extreme Area	0 to 6	1.7	1.7
	6 to 12	2.1	2.1
	12 to 24	3.5	3.5
	24 to 36	4.0	4.0
	36 to 48	4.1	4.1

D-1

Date	No. of People	Area Tested	Status Start Time	Status Stop Time	Duration, min	Operational Status	Operational Status - Comments	Track Method	Track Method=Other Explain	Pattern	Field Conditions	
05/17/2004	2	CALIBRATION LANES	1125	1335	130	SETUP/DAILY START/ STOP/CALIBRATION	SETUP/MOBILIZATION	NA	NA	NA	SUNNY	HOT
05/17/2004	2	CALIBRATION LANES	1335	1350	15	BREAK/LUNCH	BREAK	NA	NA	NA	SUNNY	HOT
05/17/2004	2	CALIBRATION LANES	1350	1520	90	SETUP/DAILY START/ STOP/CALIBRATION	SETUP/MOBILIZATION	NA	NA	NA	SUNNY	HOT
05/17/2004	2	CALIBRATION LANES	1520	1530	10	SETUP/DAILY START/ STOP/CALIBRATION	END OF DAILY OPERATIONS/ EQUIPMENT BREAKDOWN	NA	NA	NA	SUNNY	HOT
05/18/2004	2	CALIBRATION LANES	0610	1020	250	SETUP/DAILY START/ STOP/CALIBRATION	SETUP/MOBILIZATION	NA	NA	LINEAR	SUNNY	WARM
05/18/2004	2	CALIBRATION LANES	1020	1100	40	COLLECT DATA	COLLECTED DATA BI-DIRECTIONAL SOUTH TO NORTH	GPS	NA	LINEAR	SUNNY	HOT
05/18/2004	2	CALIBRATION LANES	1100	1120	20	DOWNTIME DUE TO EQUIP MAIN/CHECK	DOWNLOAD DATA	NA	NA	NA	SUNNY	HOT
05/18/2004	2	CALIBRATION LANES	1120	1200	40	DOWNTIME DUE TO EQUIP MAIN/CHECK	CHECK DATA	NA	NA	NA	SUNNY	HOT
05/18/2004	2	CALIBRATION LANES	1200	1230	30	BREAK/LUNCH	LUNCH	NA	NA	NA	SUNNY	HOT
05/18/2004	2	BLIND TEST GRID	1230	1302	32	SETUP/DAILY START/ STOP/CALIBRATION	SETUP/MOBILIZATION	NA	NA	NA	SUNNY	HOT
05/18/2004	2	BLIND TEST GRID	1302	1325	23	COLLECT DATA	COLLECTED DATA BI-DIRECTIONAL SOUTH TO NORTH	GPS	NA	LINEAR	SUNNY	HOT
05/18/2004	2	BLIND TEST GRID	1325	1333	8	DOWNTIME DUE TO EQUIP MAIN/CHECK	CHANGE BATTERIES	NA	NA	NA	SUNNY	HOT
05/18/2004	2	BLIND TEST GRID	1333	1400	27	COLLECT DATA	COLLECTED DATA BI-DIRECTIONAL SOUTH TO NORTH	GPS	NA	LINEAR	SUNNY	HOT
05/18/2004	2	BLIND TEST GRID	1400	1420	20	SETUP/DAILY START/ STOP/CALIBRATION	CALIBRATION	GPS	NA	LINEAR	SUNNY	HOT

Note: Activities pertinent to this specific demonstration are indicated in highlighted text.

Date	No. of People	Area Tested	Status Start Time	Status Stop Time	Duration, min	Operational Status	Operational Status - Comments	Track Method	Track Method=Other Explain	Pattern	Field Conditions	
05/18/2004	2	BLIND TEST GRID	1420	1450	30	SETUP/DAILY START/ STOP/CALIBRATION	END OF DAILY OPERATIONS/ BREAKDOWN	NA	NA	NA	SUNNY	HOT
05/19/2004	2	OPEN FIELD	0615	0857	162	SETUP/DAILY START/ STOP/CALIBRATION	SETUP/MOBILIZATION	NA	NA	NA	SUNNY	WARM
05/19/2004	2	OPEN FIELD	0857	0926	29	SETUP/DAILY START/ STOP/CALIBRATION	CALIBRATION	GPS	NA	LINEAR	SUNNY	WARM
05/19/2004	2	OPEN FIELD	0926	1030	56	COLLECT DATA	COLLECTED DATA BI-DIRECTIONAL NORTH TO SOUTH GRIDS A5/B5/C5/D5/E5	GPS	NA	LINEAR	SUNNY	HOT
05/19/2004	2	OPEN FIELD	1030	1040	10	DOWNTIME DUE TO EQUIP MAIN/CHECK	CHANGE BATTERIES	NA	NA	NA	SUNNY	HOT
05/19/2004	2	OPEN FIELD	1040	1050	10	DOWNTIME DUE TO EQUIP MAIN/CHECK	DOWNLOAD DATA	NA	NA	NA	SUNNY	HOT
05/19/2004	2	OPEN FIELD	1050	1100	10	DOWNTIME DUE TO EQUIP MAIN/CHECK	CHECK DATA	NA	NA	NA	SUNNY	HOT
05/19/2004	2	OPEN FIELD	1100	1117	17	BREAK/LUNCH	BREAK	NA	NA	NA	SUNNY	HOT
05/19/2004	2	OPEN FIELD	1117	1235	78	COLLECT DATA	COLLECTED DATA BI-DIRECTIONAL NORTH TO SOUTH GRIDS A5/B5/C5/D5/E5	GPS	NA	LINEAR	SUNNY	HOT
05/19/2004	2	OPEN FIELD	1235	1306	31	BREAK/LUNCH	LUNCH	NA	NA	NA	SUNNY	HOT
05/19/2004	2	OPEN FIELD	1306	1425	79	COLLECT DATA	COLLECTED DATA BI-DIRECTIONAL NORTH TO SOUTH GRIDS A5/B5/C5/D5/E5	GPS	NA	LINEAR	SUNNY	HOT
05/19/2004	2	OPEN FIELD	1425	1444	19	SETUP/DAILY START/ STOP/CALIBRATION	CALIBRATION	GPS	NA	LINEAR	SUNNY	HOT
05/19/2004	2	OPEN FIELD	1444	1500	16	SETUP/DAILY START/ STOP/CALIBRATION	END OF DAILY OPERATIONS/ EQUIPMENT BREAKDOWN	NA	NA	NA	SUNNY	HOT

Note: Activities pertinent to this specific demonstration are indicated in highlighted text.

Date	No. of People	Area Tested	Status Start Time	Status Stop Time	Duration, min	Operational Status	Operational Status - Comments	Track Method	Track Method=Other Explain	Pattern	Field Conditions	
05/20/2004	2	OPEN FIELD	0615	0650	35	SETUP/DAILY START/ STOP/CALIBRATION	SETUP/MOBILIZATION	NA	NA	NA	SUNNY	WARM
05/20/2004	2	OPEN FIELD	0650	0710	20	SETUP/DAILY START/ STOP/CALIBRATION	CALIBRATION	NA	NA	NA	SUNNY	WARM
05/20/2004	2	OPEN FIELD	0710	0855	105	COLLECT DATA	COLLECTED DATA BI-DIRECTIONAL NORTH TO SOUTH GRIDS A5/B5/C5/D5/E5	GPS	NA	LINEAR	SUNNY	WARM
05/20/2004	2	OPEN FIELD	0855	0915	20	DOWNTIME DUE TO EQUIP MAIN/CHECK	DOWNLOAD DATA	NA	NA	NA	SUNNY	WARM
05/20/2004	2	OPEN FIELD	0915	0925	10	DOWNTIME DUE TO EQUIP MAIN/CHECK	CHANGE BATTERIES	NA	NA	NA	SUNNY	WARM
05/20/2004	2	OPEN FIELD	0925	0945	20	BREAK/LUNCH	BREAK	NA	NA	NA	SUNNY	WARM
05/20/2004	2	OPEN FIELD	0945	1145	120	COLLECT DATA	COLLECTED DATA BI-DIRECTIONAL NORTH TO SOUTH GRIDS A4 -G4	GPS	NA	LINEAR	SUNNY	HOT
05/20/2004	2	OPEN FIELD	1145	1205	20	DOWNTIME DUE TO EQUIP MAIN/CHECK	CHANGE BATTERIES	NA	NA	NA	SUNNY	HOT
05/20/2004	2	OPEN FIELD	1205	1245	40	BREAK/LUNCH	LUNCH	NA	NA	NA	SUNNY	HOT
05/20/2004	2	OPEN FIELD	1245	1420	95	COLLECT DATA	COLLECTED DATA BI-DIRECTIONAL NORTH TO SOUTH GRIDS A4 - G4	GPS	NA	LINEAR	SUNNY	HOT

Date	No. of People	Area Tested	Status Start Time	Status Stop Time	Duration, min	Operational Status	Operational Status - Comments	Track Method	Track Method=Other Explain	Pattern	Field Conditions	
05/20/2004	2	OPEN FIELD	1420	1427	7	DOWNTIME DUE TO EQUIP MAIN/CHECK	CHANGE BATTERY	NA	NA	NA	SUNNY	HOT
05/20/2004	2	OPEN FIELD	1427	1444	17	COLLECT DATA	COLLECTED DATA BI-DIRECTIONAL NORTH TO SOUTH GRIDS A4 -G4	GPS	NA	LINEAR	SUNNY	HOT
05/20/2004	2	OPEN FIELD	1444	1505	21	SETUP/DAILY START/ STOP/CALIBRATION	CALIBRATION	GPS	NA	LINEAR	SUNNY	HOT
05/20/2004	2	OPEN FIELD	1505	1515	10	SETUP/DAILY START/ STOP/CALIBRATION	END OF DAILY OPERATIONS/ EQUIPMENT BREAKDOWN	NA	NA	NA	SUNNY	HOT
05/21/2004	2	OPEN FIELD	0615	0701	46	SETUP/DAILY START/ STOP/CALIBRATION	SET UP/ MOBILIZATION	NA	NA	NA	SUNNY	COOL WINDY
05/21/2004	2	OPEN FIELD	0701	0725	24	SETUP/DAILY START/ STOP/CALIBRATION	CALIBRATION	GPS	NA	LINEAR	SUNNY	COOL WINDY
05/21/2004	2	OPEN FIELD	0725	0912	107	COLLECT DATA	COLLECTED DATA BI-DIRECTIONAL NORTH TO SOUTH GRIDS A4 -G4	GPS	NA	LINEAR	SUNNY	COOL WINDY
05/21/2004	2	OPEN FIELD	0912	0917	5	BREAK/LUNCH	BREAK	NA	NA	NA	SUNNY	COOL
05/21/2004	2	OPEN FIELD	0917	1000	43	COLLECT DATA	COLLECTED DATA BI-DIRECTIONAL NORTH TO SOUTH GRIDS A4 -G4	GPS	NA	LINEAR	SUNNY	WARM

Date	No. of People	Area Tested	Status Start Time	Status Stop Time	Duration, min	Operational Status	Operational Status - Comments	Track Method	Track Method=Other Explain	Pattern	Field Conditions	
05/21/2004	2	OPEN FIELD	1000	1030	30	DOWNTIME DUE TO EQUIP MAIN/CHECK	DOWNLOAD DATA	NA	NA	NA	SUNNY	WARM
05/21/2004	2	OPEN FIELD	1030	1040	10	DOWNTIME DUE TO EQUIP MAIN/CHECK	CHANGE BATTERIES	GPS	NA	LINEAR	SUNNY	WARM
05/21/2004	2	OPEN FIELD	1040	1120	40	BREAK/LUNCH	BREAK	NA	NA	NA	SUNNY	HOT
05/21/2004	2	OPEN FIELD	1120	1418	178	COLLECT DATA	COLLECTED DATA BI-DIRECTIONAL NORTH TO SOUTH GRIDS A3 –G3	GPS	NA	LINEAR	SUNNY	HOT WINDY
05/21/2004	2	OPEN FIELD	1418	1424	6	DOWNTIME DUE TO EQUIP MAIN/CHECK	CHANGE BATTERIES	NA	NA	NA	SUNNY	HOT WINDY
05/21/2004	2	OPEN FIELD	1424	1445	21	COLLECT DATA	COLLECTED DATA BI-DIRECTIONAL NORTH TO SOUTH GRIDS A3 –G3	GPS	NA	LINEAR	SUNNY	HOT WINDY
05/21/2004	2	OPEN FIELD	1445	1505	20	DOWNTIME DUE TO EQUIP MAIN/CHECK	DOWNLOAD DATA	NA	NA	NA	SUNNY	HOT WINDY
05/21/2004	2	OPEN FIELD	1505	1518	13	SETUP/DAILY START/ STOP/CALIBRATION	CALIBRATION	GPS	NA	LINEAR	SUNNY	HOT WINDY
05/21/2004	2	OPEN FIELD	1518	1530	12	SETUP/DAILY START/ STOP/CALIBRATION	END OF DAILY OPERATIONS/ EQUIPMENT BREAKDOWN	NA	NA	NA	SUNNY	HOT WINDY

Date	No. of People	Area Tested	Status Start Time	Status Stop Time	Duration, min	Operational Status	Operational Status - Comments	Track Method	Track Method=Other Explain	Pattern	Field Conditions	
05/22/2004	2	OPEN FIELD	0610	0638	28	SETUP/DAILY START/ STOP/CALIBRATION	SETUP/MOBILIZATION	NA	NA	LINEAR	SUNNY	WARM
05/22/2004	2	OPEN FIELD	0638	0700	22	SETUP/DAILY START/ STOP/CALIBRATION	CALIBRATION	GPS	NA	LINEAR	SUNNY	WARM
05/22/2004	2	OPEN FIELD	0700	0940	160	COLLECT DATA	COLLECTED DATA BI-DIRECTIONAL NORTH TO SOUTH GRIDS A3 –G3	GPS	NA	LINEAR	SUNNY	WARM
05/22/2004	2	OPEN FIELD	0940	1010	30	DOWNTIME DUE TO EQUIP MAIN/CHECK	DOWNLOAD DATA	NA	NA	NA	SUNNY	WARM
05/22/2004	2	OPEN FIELD	1010	1030	20	DOWNTIME DUE TO EQUIP MAIN/CHECK	CHANGE BATTERIES	NA	NA	NA	SUNNY	WARM
05/22/2004	2	OPEN FIELD	1030	1050	20	BREAK/LUNCH	BREAK	NA	NA	NA	SUNNY	HOT
05/22/2004	2	OPEN FIELD	1050	1255	125	COLLECT DATA	COLLECTED DATA BI-DIRECTIONAL NORTH TO SOUTH GRIDS A3 –G3	GPS	NA	LINEAR	SUNNY	HOT
05/22/2004	2	OPEN FIELD	1255	1327	32	DOWNTIME DUE TO EQUIP MAIN/CHECK	DOWNLOAD DATA	NA	NA	NA	SUNNY	HOT
05/22/2004	2	OPEN FIELD	1327	1340	13	SETUP/DAILY START/ STOP/CALIBRATION	CALIBRATION	GPS	NA	LINEAR	SUNNY	HOT

Date	No. of People	Area Tested	Status Start Time	Status Stop Time	Duration, min	Operational Status	Operational Status - Comments	Track Method	Track Method=Other Explain	Pattern	Field Conditions	
05/22/2004	2	OPEN FIELD	1340	1350	10	SETUP/DAILY START/ STOP/CALIBRATION	END OF DAILY OPERATIONS/ EQUIPMENT BREAKDOWN	NA	NA	NA	SUNNY	HOT
05/24/2004	2	OPEN FIELD	0745	0800	15	SETUP/DAILY START/ STOP/CALIBRATION	SETUP/ MOBILIZATION	NA	NA	NA	SUNNY	HOT
05/24/2004	2	OPEN FIELD	0800	1000	120	SETUP/DAILY START/ STOP/CALIBRATION	CALIBRATION	GPS	NA	LINEAR	SUNNY	HOT
05/24/2004	2	OPEN FIELD	1000	1200	120	COLLECT DATA	COLLECTED DATA BI-DIRECTIONAL NORTH TO SOUTH GRIDS A2 -G2	GPS	NA	LINEAR	SUNNY	HOT
05/24/2004	2	OPEN FIELD	1200	1230	30	DOWNTIME DUE TO EQUIP MAIN/CHECK	DOWNLOAD DATA	NA	NA	NA	SUNNY	HOT
05/24/2004	2	OPEN FIELD	1230	1240	10	DOWNTIME DUE TO EQUIP MAIN/CHECK	CHANGE BATTERIES	NA	NA	NA	SUNNY	HOT
05/24/2004	2	OPEN FIELD	1240	1350	70	BREAK/LUNCH	LUNCH	NA	NA	NA	SUNNY	HOT
05/24/2004	2	OPEN FIELD	1350	1425	35	DOWNTIME DUE TO EQUIPMENT FAILURE	REMOVED AND REPLACED WHEEL SHAFT	NA	NA	NA	SUNNY	HOT
05/24/2004	2	OPEN FIELD	1425	1605	100	COLLECT DATA	COLLECTED DATA BI-DIRECTIONAL NORTH TO SOUTH GRIDS A2 -G2	GPS	NA	LINEAR	SUNNY	HOT
05/24/2004	2	OPEN FIELD	1605	1620	15	SETUP/DAILY START/ STOP/CALIBRATION	CALIBRATION	GPS	NA	LINEAR	SUNNY	HOT
05/24/2004	2	OPEN FIELD	1620	1630	10	SETUP/DAILY START/ STOP/CALIBRATION	END OF DAILY OPERATIONS/ EQUIPMENT BREAKDOWN	NA	NA	NA	SUNNY	HOT
05/25/2004	2	OPEN FIELD	0620	0645	25	SETUP/DAILY START/ STOP/CALIBRATION	SETUP/MOBILIZATION	NA	NA	NA	SUNNY	COOL
05/25/2004	2	OPEN FIELD	0645	0725	40	SETUP/DAILY START/ STOP/CALIBRATION	CALIBRATION	GPS	NA	LINEAR	SUNNY	COOL

Date	No. of People	Area Tested	Status Start Time	Status Stop Time	Duration, min	Operational Status	Operational Status - Comments	Track Method	Track Method=Other Explain	Pattern	Field Conditions	
05/25/2004	2	OPEN FIELD	0725	0843	78	COLLECT DATA	COLLECTED DATA BI-DIRECTIONAL NORTH TO SOUTH GRIDS A2 -G2	GPS	NA	LINEAR	SUNNY	WARM
05/25/2004	2	OPEN FIELD	0843	0852	9	DOWNTIME DUE TO EQUIP MAIN/CHECK	CHANGE BATTERIES	NA	NA	NA	SUNNY	WARM
05/25/2004	2	OPEN FIELD	0852	0940	48	COLLECT DATA	COLLECTED DATA BI-DIRECTIONAL NORTH TO SOUTH GRIDS A2 -G2	GPS	NA	LINEAR	SUNNY	WARM
05/25/2004	2	OPEN FIELD	0940	1010	30	DOWNTIME DUE TO EQUIP MAIN/CHECK	DOWNLOAD DATA	NA	NA	NA	SUNNY	WARM
05/25/2004	2	OPEN FIELD	1010	1110	60	BREAK/LUNCH	BREAK	NA	NA	NA	SUNNY	WARM
05/25/2004	2	OPEN FIELD	1110	1200	50	COLLECT DATA	COLLECTED DATA BI-DIRECTIONAL NORTH TO SOUTH GRIDS A2 -G2	GPS	NA	LINEAR	SUNNY	HOT
05/25/2004	2	MOGUL	1200	1205	5	SETUP/DAILY START/ STOP/CALIBRATION	SETUP/MOBILIZATION	NA	NA	NA	SUNNY	HOT
05/25/2004	2	MOGUL	1205	1302	57	COLLECT DATA	RUNNING MOGUL BI-DIRECTIONAL NORTH TO SOUTH	GPS	NA	LINEAR	SUNNY	HOT
05/25/2004	2	MOGUL	1302	1307	5	DOWNTIME DUE TO EQUIP MAIN/CHECK	CHANGE BATTERIES	NA	NA	NA	SUNNY	HOT
05/25/2004	2	MOGUL	1307	1410	63	COLLECT DATA	RUNNING MOGUL BI-DIRECTIONAL NORTH TO SOUTH	GPS	NA	NA	SUNNY	HOT
05/25/2004	2	MOGUL	1410	1428	18	DOWNTIME DUE TO EQUIP MAIN/CHECK	DOWNLOAD DATA	NA	NA	NA	SUNNY	HOT
05/25/2004	2	MOGUL	1428	1545	77	COLLECT DATA	RUNNING MOGUL BI-DIRECTIONAL NORTH TO SOUTH	GPS	NA	LINEAR	SUNNY	HOT
05/25/2004	2	MOGUL	1545	1600	15	SETUP/DAILY START/ STOP/CALIBRATION	CALIBRATION	GPS	NA	LINEAR	SUNNY	HOT

Date	No. of People	Area Tested	Status Start Time	Status Stop Time	Duration, min	Operational Status	Operational Status - Comments	Track Method	Track Method=Other Explain	Pattern	Field Conditions	
05/25/2004	2	MOGUL	1600	1610	10	SETUP/DAILY START/ STOP/CALIBRATION	END OF DAILY OPERATIONS/ EQUIPMENT BREAKDOWN	NA	NA	NA	SUNNY	HOT
05/26/2004	2	MOGUL	0620	0640	10	SETUP/DAILY START/ STOP/CALIBRATION	SETUP/MOBILIZATION	NA	NA	NA	SUNNY	COOL
05/26/2004	2	MOGUL	0640	0705	25	SETUP/DAILY START/ STOP/CALIBRATION	CALIBRATION	GPS	NA	LINEAR	SUNNY	COOL
05/26/2004	2	MOGUL	0705	0750	45	COLLECT DATA	RUNNING MOGUL BI-DIRECTIONAL NORTH TO SOUTH	GPS	NA	LINEAR	SUNNY	COOL
05/26/2004	2	OPEN FIELD	0750	0755	5	SETUP/DAILY START/ STOP/CALIBRATION	SETUP/MOBILIZATION	NA	NA	NA	SUNNY	WARM
05/26/2004	2	OPEN FIELD	0755	0855	60	COLLECT DATA	RUNNING OPEN RANGE BI-DIRECTIONAL NORTH TO SOUTH	GPS	NA	LINEAR	SUNNY	WARM
05/26/2004	2	OPEN FIELD	0855	0925	30	DOWNTIME DUE TO EQUIP MAIN/CHECK	DOWNLOAD DATA	NA	NA	NA	SUNNY	HOT
05/26/2004	2	OPEN FIELD	0925	0935	10	DOWNTIME DUE TO EQUIP MAIN/CHECK	CHANGE BATTERIES	NA	NA	NA	SUNNY	HOT
05/26/2004	2	OPEN FIELD	0935	1025	55	BREAK/LUNCH	BREAK	NA	NA	NA	SUNNY	HOT
05/26/2004	2	OPEN FIELD	1025	1048	23	SETUP/DAILY START/ STOP/CALIBRATION	SETUP/MOBILIZATION	NA	NA	NA	SUNNY	HOT
05/26/2004	2	OPEN FIELD	1048	1215	87	COLLECT DATA	RUNNING OPEN RANGE BI-DIRECTIONAL NORTH TO SOUTH	GPS	NA	NA	SUNNY	HOT
05/26/2004	2	OPEN FIELD	1215	1230	15	BREAK/LUNCH	BREAK	NA	NA	NA	SUNNY	HOT
05/26/2004	2	YUMA EXTERME	1230	1320	50	SETUP/DAILY START/ STOP/CALIBRATION	SETUP/MOBILIZATION	NA	NA	NA	SUNNY	HOT
05/26/2004	2	YUMA EXTERME	1320	1541	141	COLLECT DATA	RUNNING YUMA EXTERME BI-DIRECTIONAL NORTH TO SOUTH	GPS	NA	LINEAR	SUNNY	HOT

Date	No. of People	Area Tested	Status Start Time	Status Stop Time	Duration, min	Operational Status	Operational Status - Comments	Track Method	Track Method=Other Explain	Pattern	Field Conditions	
05/26/2004	2	YUMA EXTERME	1541	1550	9	DOWNTIME DUE TO EQUIP MAIN/CHECK	CHANGE BATTERIES	NA	NA	NA	SUNNY	HOT
05/26/2004	2	YUMA EXTERME	1550	1630	40	COLLECT DATA	RUNNING YUMA EXTERME BI-DIRECTIONAL NORTH TO SOUTH	GPS	NA	LINEAR	SUNNY	HOT
05/26/2004	2	YUMA EXTERME	1630	1645	15	SETUP/DAILY START/ STOP/CALIBRATION	CALIBRATION	GPS	NA	LINEAR	SUNNY	HOT
05/26/2004	2	YUMA EXTERME	1645	1658	13	SETUP/DAILY START/ STOP/CALIBRATION	END OF DAILY OPERATIONS/ EQUIPMENT BREAKDOWN	NA	NA	NA	SUNNY	HOT
05/27/2004	2	YUMA EXTERME	0625	0650	25	SETUP/DAILY START/ STOP/CALIBRATION	SETUP/MOBILIZATION	NA	NA	NA	SUNNY	COOL
05/27/2004	2	YUMA EXTERME	0650	0710	20	SETUP/DAILY START/ STOP/CALIBRATION	CALIBRATION	GPS	NA	LINEAR	SUNNY	WARM
05/27/2004	2	YUMA EXTERME	0710	0722	12	SETUP/DAILY START/ STOP/CALIBRATION	SETUP/MOBILIZATION	NA	NA	NA	SUNNY	WARM
05/27/2004	2	YUMA EXTERME	0722	1220	242	COLLECT DATA	RUNNING YUMA EXTERME BI-DIRECTIONAL NORTH TO SOUTH	GPS	NA	LINEAR	SUNNY	WARM
05/27/2004	2	YUMA EXTERME	1220	1300	40	DOWNTIME DUE TO EQUIP MAIN/CHECK	DOWNLOAD DATA	NA	NA	NA	SUNNY	HOT
05/27/2004	2	YUMA EXTERME	1300	1315	15	DOWNTIME DUE TO EQUIP MAIN/CHECK	CHANGE BATTERIES	NA	NA	NA	SUNNY	HOT
05/27/2004	2	YUMA EXTERME	1315	1420	65	BREAK/LUNCH	LUNCH	NA	NA	NA	SUNNY	HOT
05/27/2004	2	YUMA EXTERME	1420	1445	25	COLLECT DATA	RUNNING YUMA EXTERME BI-DIRECTIONAL NORTH TO SOUTH	GPS	NA	LINEAR	SUNNY	HOT

Date	No. of People	Area Tested	Status Start Time	Status Stop Time	Duration, min	Operational Status	Operational Status - Comments	Track Method	Track Method=Other Explain	Pattern	Field Conditions	
05/27/2004	2	MOGUL	1445	1500	15	SETUP/DAILY START/ STOP/CALIBRATION	SETUP/MOBILIZATION	NA	NA	NA	SUNNY	HOT
05/27/2004	2	MOGUL	1500	1515	15	DOWNTIME DUE TO EQUIP MAIN/CHECK	MODIFIED EM61-MK2 FOR TWO MEN SUPPORT TO RUN MOGUL	NA	NA	NA	SUNNY	HOT
05/27/2004	2	MOGUL	1515	1548	33	COLLECT DATA	RUNNING MOGUL BI-DIRECTIONAL NORTH TO SOUTH	GPS	NA	LINEAR	SUNNY	HOT
05/27/2004	2	MOGUL	1548	1555	7	DOWNTIME DUE TO EQUIP MAIN/CHECK	CHANGE BATTERIES	NA	NA	NA	SUNNY	HOT
05/27/2004	2	MOGUL	1555	1620	25	COLLECT DATA	RUNNING MOGUL BI-DIRECTIONAL NORTH TO SOUTH	GPS	NA	LINEAR	SUNNY	HOT
05/27/2004	2	MOGUL	1620	1630	10	BREAK/LUNCH	BREAK	NA	NA	NA	SUNNY	HOT
05/27/2004	2	MOGUL	1630	1645	15	COLLECT DATA	RUNNING MOGUL BI-DIRECTIONAL NORTH TO SOUTH	GPS	NA	LINEAR	SUNNY	HOT
05/27/2004	2	MOGUL	1645	1657	12	SETUP/DAILY START/ STOP/CALIBRATION	CALIBRATION	GPS	NA	LINEAR	SUNNY	HOT
05/27/2004	2	MOGUL	1657	1710	13	SETUP/DAILY START/ STOP/CALIBRATION	END OF DAILY OPERATIONS/ EQUIPMENT BREAKDOWN	NA	NA	NA	SUNNY	HOT
05/28/2004	2	MOGUL	0610	0645	35	SETUP/DAILY START/ STOP/CALIBRATION	SETUP/MOBILIZATION	NA	NA	NA	SUNNY	WARM
05/28/2004	2	MOGUL	0645	0710	25	SETUP/DAILY START/ STOP/CALIBRATION	CALIBRATION	GPS	NA	LINEAR	SUNNY	WARM
05/28/2004	2	MOGUL	0710	0720	10	SETUP/DAILY START/ STOP/CALIBRATION	SETUP/MOBILIZATION	NA	NA	NA	SUNNY	WARM
05/28/2004	2	MOGUL	0720	0928	128	COLLECT DATA	RUNNING MOGUL BI-DIRECTIONAL NORTH TO SOUTH	GPS	NA	LINEAR	SUNNY	HOT

Date	No. of People	Area Tested	Status Start Time	Status Stop Time	Duration, min	Operational Status	Operational Status - Comments	Track Method	Track Method=Other Explain	Pattern	Field Conditions	
05/28/2004	2	MOGUL	0928	0958	30	DOWNTIME DUE TO EQUIP MAIN/CHECK	DOWNLOAD DATA	NA	NA	NA	SUNNY	HOT
05/28/2004	2	MOGUL	0958	1045	47	DOWNTIME DUE TO EQUIP MAIN/CHECK	CHECK DATA	NA	NA	NA	SUNNY	HOT
05/28/2004	2	MOGUL	1045	1100	15	BREAK/LUNCH	BREAK	NA	NA	NA	SUNNY	HOT
05/28/2004	2	CALIBRATION LANES	1100	1130	30	SETUP/DAILY START/ STOP/CALIBRATION	SETUP/MOBILIZATION	NA	NA	NA	SUNNY	HOT
05/28/2004	2	CALIBRATION LANES	1130	1202	32	COLLECT DATA	RUNNING CALIBRATION LANES BI-DIRECTIONAL NORTH TO SOUTH	GPS	NA	LINEAR	SUNNY	HOT
05/28/2004	2	CALIBRATION LANES	1202	1217	15	SETUP/DAILY START/ STOP/CALIBRATION	CALIBRATION	GPS	NA	LINEAR	SUNNY	HOT
05/28/2004	2	CALIBRATION LANES	1217	1400	103	DEMOBILIZATION	END OF TEST TURN-IN DISK DEMOBILIZATION	NA	NA	NA	SUNNY	HOT

Note: Activities pertinent to this specific demonstration are indicated in highlighted text.

## **APPENDIX E. REFERENCES**

1. Standardized UXO Technology Demonstration Site Handbook, DTC Project No. 8-CO-160-000-473, Report No. ATC-8349, March 2002.
2. Aberdeen Proving Ground Soil Survey Report, October 1998.
3. Data Summary, UXO Standardized Test Site: APG Soils Description, May 2002.
4. Yuma Proving Ground Soil Survey Report, May 2003.
5. Practical Nonparametric Statistics, W.J. Conover, John Wiley & Sons, 1980, pages 144 through 151.

## **APPENDIX F. ABBREVIATIONS**

AEC	=	U.S. Army Environmental Center
APG	=	Aberdeen Proving Ground
ASCII	=	American Standard Code for Information Interchange.
ATC	=	U.S. Army Aberdeen Test Center
EM	=	electromagnetic
EMI	=	electromagnetic interference
EMIS	=	Electromagnetic Induction Spectroscopy
ERDC	=	U.S. Army Corps of Engineers Engineering Research and Development Center
ESTCP	=	Environmental Security Technology Certification Program
EQT	=	Army Environmental Quality Technology Program
FPGA	=	Field Programmable Gate Array
GPS	=	Global Positioning System
JPG	=	Jefferson Proving Ground
PM	=	project manager
POC	=	point of contact
QA	=	quality assurance
QC	=	quality control
ROC	=	receiver-operating characteristic
RTK	=	real time kinematic
RTS	=	Robotic Total Station
SERDP	=	Strategic Environmental Research and Development Program
UTM	=	Universal Transverse Mercator
UXO	=	unexploded ordnance
YPG	=	U.S. Army Yuma Proving Ground

